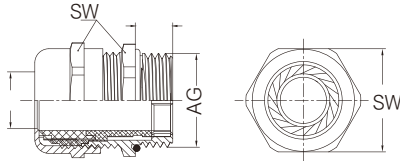




## 电缆接头Cable glands

## 普通金属防水电缆接头 Plastic cable gland

材料：黄铜镀镍	Material : Nickel-plate brass
密封件：尼龙6和丁晴橡胶	Sealing: Nylon and NBR
防护等级：IP68(要使用O型圈的情况下)	Degree of protection: IP68(with O-sealing)
温度范围：静态：-40°C...+100°C	Temperature range: Stat: -40°C...+100°C
动态：-20°C...+80°C	Dyn: -20°C...+80°C


 单位：mm  
Unit: mm

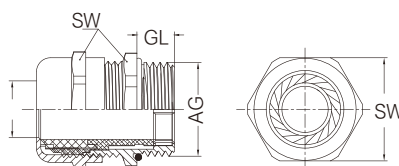
螺纹尺寸 Thread size	卡口范围(Φ) Clamping range(Φ)	螺纹外径(AG) Thread diameter(AG)	扳手尺寸(SW) Wrench size(SW)	螺纹长度(GL) Thread length(GL)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG7	3-6.5	12.5	14	6	WNA-PG7(D3-6.5)	0900000110
PG9	4-8	15.2	17	6.5	WNA-PG9(D4-8)	0900000111
PG11	5-10	18.6	20	7	WNA-PG11(D5-10)	0900000112
PG13.5	6-12	20.4	22	7.5	WNA-PG13.5(D6-12)	0900000113
PG16	8-14	22.5	24	7	WNA-PG16(8-14)	0900000114
PG21	13-18	28.3	30	8	WNA-PG21(D13-18)	0900000115
PG29	18-25	37.0	40	9	WNA-PG29(D18-25)	0900000116
PG36	22-32	47.0	50	12	WNA-PG36(D22-32)	0900000117
PG42	31-38	54.0	57	12	WNA-PG42(D31-38)	0900000118
PG48	37-44	59.3	65	12	WNA-PG48(D37-44)	0900000119
M 公制螺纹 Metric Thread						
M12x1.5	3-6.5	12	14	6	WNA-M12(D3-6.5)	1900000110
M14x1.5	3-6.5	14	14	6	WNA-M14(D3-6.5)	1900000111
M16x1.5	4-8	16	17	6.5	WNA-M16(D4-8)	1900000112
M16x1.5	5-10	16	20	6	WNA-M16(D5-10)	1900000113
M16x1.5	5-10	18	20	7	WNA-M18(D5-10)	1900000114
M20x1.5	6-12	20	22	8	WNA-M20(D6-12)	1900000115
M20x1.5	8-14	20	24	8	WNA-M20(D8-14)	1900000116
M22x1.5	8-14	22	24	7.5	WNA-M22(D8-14)	1900000117
M25x1.5	9-16	25	27	7.5	WNA-M25(D9-16)	1900000118
M25x1.5	13-18	25	30	7.5	WNA-M25(D13-18)	1900000119
M32x1.5	15-22	32	35	8.5	WNA-M32(D15-22)	1900000120
M32x1.5	18-25	32	40	8.0	WNA-M32(D18-25)	1900000121
M40x1.5	18-25	40	45	12	WNA-M40(D18-25)	1900000122
M40x1.5	22-32	40	50	12	WNA-M40(D22-32)	1900000123
M50x1.5	22-32	50	57	12	WNA-M50(D22-32)	1900000124
M50x1.5	31-38	50	57	12	WNA-M50(D31-38)	1900000125
M63x1.5	37-44	63	65	12	WNA-M63(D37-44)	1900000126



## 电缆接头 Cable glands

## 普通塑料防水电缆接头 Plastic cable gland

材料: 尼龙	Material: Nylon
密封件: 丁晴橡胶	Sealing: NBR
防护等级: IP68(要使用O型圈的情况下)	Degree of protection: IP68(with O-sealing)
温度范围: 静态: -40°C...+100°C	Temperature range: Stat: -40°C...+100°C
动态: -20°C...+80°C	Dyn: -20°C...+80°C


 单位: mm  
Unit: mm

螺纹尺寸 Thread size	卡口范围(Φ) Clamping range(Φ)	螺纹外径(AG) Thread diameter (AG)	扳手尺寸(SW) Wrench size (SW)	螺纹长度(GL) Thread length (GL)	型号(灰色) Designation (Grey)	型号 Designation	型号(黑色) Designation (Black)	订货号 Order NO.
PG制螺纹 PG Thread								
PG7	3-6.5	12.5	15	8.5	WNAP-PG7G	09000000210	WNAP-PG7B	09000000220
PG9	4-8	15.2	19	8.0	WNAP-PG9G	09000000211	WNAP-PG9B	09000000221
PG11	5-10	18.6	22	8.0	WNAP-PG11G	09000000212	WNAP-PG11B	09000000222
PG13.5	6-12	20.4	24	10	WNAP-PG13.5G	09000000213	WNAP-PG13.5B	09000000223
PG16	8-14	22.5	27	10	WNAP-PG16G	09000000214	WNAP-PG16B	09000000224
PG21	13-18	28.3	33	11	WNAP-PG21G	09000000215	WNAP-PG21B	09000000225
PG29	18-25	37.0	42	11	WNAP-PG29G	09000000216	WNAP-PG29B	09000000226
PG36	22-32	47.0	52	13	WNAP-PG36G	09000000217	WNAP-PG36B	09000000227
PG42	31-38	54.0	60	15	WNAP-PG42G	09000000218	WNAP-PG42B	09000000228
PG48	37-44	59.3	65	14.0	WNAP-PG48G	09000000219	WNAP-PG48B	09000000229
M 公制螺纹 Metric Thread								
M12x1.5	3-6.5	12	15	8	WNAP-M12G	19000000210	WNAP-M12B	19000000220
M16x1.5	4-8	16	19	8	WNAP-M16G	19000000211	WNAP-M16B	19000000221
M20x1.5	5-10	20	24	9	WNAP-M20G	19000000212	WNAP-M20B	19000000222
M20x1.5	6-12	20	24	9	WNAP-M20G(D6-12)	19000000213	WNAP-M20B(D6-12)	19000000223
M22x1.5	8-14	22	27	10	WNAP-M22G	19000000214	WNAP-M22B	19000000224
M25x1.5	13-18	25	33	11	WNAP-M25G	19000000215	WNAP-M25B	19000000225
M32x1.5	18-25	32	42	11	WNAP-M32G	19000000216	WNAP-M32B	19000000226
M40x1.5	22-32	40	51	13	WNAP-M40G	19000000217	WNAP-M40B	19000000227
M50x1.5	31-38	50	60	13	WNAP-M50G	19000000218	WNAP-M50B	19000000228
M63x1.5	37-44	63	65	14	WNAP-M63G	19000000219	WNAP-M63B	19000000229



## 电缆接头Cable glands

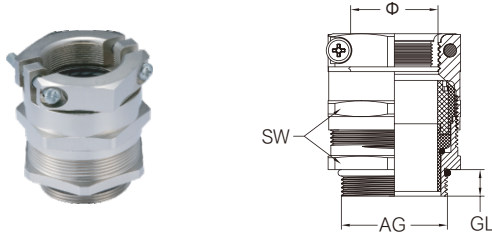
## 双锁紧型金属电缆接头 Gland with external strain relief via calmping jaws

材料：黄铜镀镍(外壳)，尼龙PA66(芯套)

Material: Nickel-plate brass, Nylon

防护等级：IP68(要使用O型圈的情况下)

Degree of protection: IP68(with O-sealing)


 单位：mm  
Unit: mm


螺纹尺寸 Thread size	卡口范围(Φ) Clamping range(Φ)	螺纹外径(AG) Thread diameter(AG)	扳手尺寸(SW) Wrench size(SW)	螺纹长度(GL) Thread length(GL)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG9	4-8	15.2	17	7	WNKS-PG9(4-8)	0900000310
PG11	5-10	18.6	22	7	WNKS-PG11(5-10)	0900000311
PG13.5	6-12	20.4	22	8	WNKS-PG13.5(6-12)	0900000312
PG16	10-14	22.5	24	7.5	WNKS-PG16(10-14)	0900000313
PG21	13-18	28.3	30	8	WNKS-PG21(13-18)	0900000314
PG29	18-25	37.0	40	9	WNKS-PG29(18-25)	0900000315
PG36	22-32	47.0	50	12	WNKS-PG36(22-32)	0900000316
PG42	30-38	54.0	57	12	WNKS-PG42(30-38)	0900000317
M 公制螺纹 Metric Thread						
M16x1.5	4-8	16	18	6.5	WNKS-M16(4-8)	1900000310
M16x1.5	5-10	16	22	6	WNKS-M16(5-10)	1900000311
M20x1.5	6-12	20	22	7.5	WNKS-M20(6-12)	1900000312
M25x1.5	10-16	25	27	8	WNKS-M25(10-16)	1900000313
M25x1.5	13-18	25	30	7.5	WNKS-M25(13-18)	1900000314
M32x1.5	16-22	32	35	8.5	WNKS-M32(16-22)	1900000315
M32x1.5	18-25	32	40	8	WNKS-M32(18-25)	1900000316
M40x1.5	22-30	40	45	12	WNKS-M40(22-30)	1900000317
M40x1.5	22-32	40	50	12	WNKS-M40(22-32)	1900000318
M50x1.5	30-38	50	57	12	WNKS-M50(30-38)	1900000319



## 电缆接头Cable glands

## 普通兼容金属防水接头 EMC Cable gland

材料：黄铜镀镍	Material : Nickel-plate brass
密封件：尼龙66和丁晴橡胶	Sealing: Nylon and NBR
防护等级：IP68(要使用O型圈的情况下)	Degree of protection: IP68(with O-sealing)
温度范围：-40℃...+100℃,短时间可以达到120℃	Temperature range: -40℃...+100℃,short-term120℃


 单位：mm  
Unit: mm

螺纹尺寸 Thread size	卡口范围(Φ) Clamping range(Φ)	螺纹外径(AG) Thread diameter(AG)	扳手尺寸(SW) Wrench size(SW)	螺纹长度(GL) Thread length(GL)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG7	3-6.5	12.5	14	5	WNAC-PG7(D3-6.5)	0900000410
PG9	4-8	15.2	18	6	WNAC-PG9(D4-8)	0900000411
PG11	5-10	18.6	20	6	WNAC-PG11(D5-10)	0900000412
PG13.5	6-12	20.4	24	7	WNAC-PG13.5(D6-12)	0900000413
PG16	8-14	22.5	24	7	WNAC-PG16(D8-14)	0900000414
PG21	13-18	28.3	30	8	WNAC-PG21(D13-18)	0900000415
PG29	18-25	37.0	40	8	WNAC-PG29(D18-25)	0900000416
PG36	22-32	47.0	50	9	WNAC-PG36(D22-32)	0900000417
PG42	30-38	54.0	57	9	WNAC-PG42(D30-38)	0900000418
M 公制螺纹 Metric Thread						
M12x1.5	3-6.5	12	14	5	WNAC-M12(D3-6.5)	1900000410
M16x1.5	4-8	16	20	6	WNAC-M16(D4-8)	1900000411
M18x1.5	5-10	18	20	6	WNAC-M18(D5-10)	1900000412
M20x1.5	6-12	20	24	7	WNAC-M20(D6-12)	1900000413
M24x1.5	8-14	24	27	7	WNAC-M24(D8-14)	1900000414
M25x1.5	10-16	25	27	12	WNAC-M25(D10-16)	1900000415
M25x1.5	13-18	25	30	13	WNAC-M25(D13-18)	1900000416
M30x1.5	13-18	30	35	8	WNAC-M30(D13-18)	1900000417
M32x1.5	15-22	32	40	13	WNAC-M32(D15-22)	1900000418
M32x1.5	18-25	32	40	13	WNAC-M32(D18-25)	1900000419
M36x1.5	18-25	36	40	8	WNAC-M36(D18-25)	1900000420
M40x1.5	21-30	40	45	9	WNAC-M40(D21-30)	1900000421
M40x1.5	22-32	40	50	9	WNAC-M40(D22-32)	1900000422
M48x1.5	22-32	48	50	9	WNAC-M48(D22-32)	1900000423
M50x1.5	30-38	50	57	9	WNAC-M50(D30-38)	1900000424
M56x1.5	30-38	56	57	9	WNAC-M56(D30-38)	1900000425
M63x1.5	37-44	63	65	10	WNAC-M63(D37-44)	1900000426



## 电缆接头Cable glands

## 多芯金属防水电缆接头 Metal cable gland with multi core

材料：黄铜镀镍

Material : Nickel-plate brass

密封件：尼龙66和丁晴橡胶

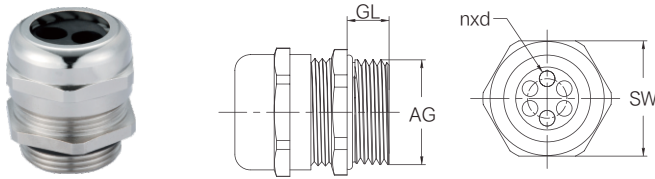
Sealing: Nylon and NBR

防护等级：IP65

Degree of protection: IP65

温度范围：-40°C...+100°C,短时间可以达到120°C

Temperature range: -40°C...+100°C,short-term 120°C


 单位：mm  
Unit: mm

螺纹尺寸 Thread side	卡口范围(nxd) Clamping range(nxd)	螺纹外径(AG) Thread diameter(AG)	扳手尺寸(SW) Wrench size(SW)	螺纹长度(GL) Thread length(GL)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG9	2x3	15.2	17	6.7	WNAM-PG9/(2x3)	0900000510
PG21	4x6	28.3	30	8	WNAM-PG21/(4x6)	0900000511
PG21	3x7	28.3	30	8	WNAM-PG21/(3x7)	0900000512
PG21	2x6	28.3	30	8	WNAM-PG21/(2x6)	0900000513
PG21	2x7	28.3	30	8	WNAM-PG21/(2x7)	0900000514
PG21	2x8	28.3	30	8	WNAM-PG21/(2x8)	0900000515
PG29	4x9	37	40	9	WNAM-PG29/(4x9)	0900000516
PG36	5x9	47	50	12	WNAM-PG36/(5x9)	0900000517
M 公制螺纹 Metric Thread						
M16x1.5	2x3	16	17	6.5	WNAM-M16/(2x3)	1900000510
M20x1.5	6x3	20	22	8	WNAM-M20/(6x3)	1900000511
M20x1.5	2x5	20	22	8	WNAM-M20/(2x5)	1900000512
M25x1.5	2x7	25	30	7.5	WNAM-M25/(2x7)	1900000513
M25x1.5	4x6	25	30	7.5	WNAM-M25/(4x6)	1900000514
M25x1.5	3x7	25	30	7.5	WNAM-M25/(3x7)	1900000515
M25x1.5	2x8	33	30	7.5	WNAM-M25/(2x8)	1900000516
M32x1.5	4x9	32	40	8	WNAM-M32/(4x9)	1900000517
M40x1.5	5x9	40	50	12	WNAM-M40/(5x9)	1900000518
M40x1.5	2x15	40	50	12	WNAM-M40/(2x15)	1900000519



## 电缆接头Cable glands

## 外螺纹金属软管接头 Outer thread tube connector

材料：锌合金镀锌或镀铬


Material: Zinc alloy,Zinc plated or Chromium plated

 密封件：一端连接软管，另一端由螺纹连接箱体或设备，  
具有结构紧凑，耐腐蚀等特点

 Specialty: one end is connector to flexible tube,the other thread end  
connected to switch chest or equipment,the structure iscompact ,the surface is a ntiroten

应用场合：电机、电缆桥架、电气工程安装、电控箱等

Applications: Electromotor、Cable bridge frame、Electric engineering、Electric control etc.


 单位：mm  
Unit: mm

螺纹尺寸 Thread size	配用软管(d) Fits to tubing size(d)	螺纹长度(GL) Thread lengthGL	外圆直径(D) External diameter(D)	高度(GL) Height(GL)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG9	10	8.5	26	30	WNC-PG9/D10	0900000610
PG11	12	10.5	27.5	32	WNC-PG11/D12	0900000611
PG13.5	15	11.5	31.5	34	WNC-PG13.5/D15	0900000612
PG16	15	12.5	32	34	WNC-PG16/D15	0900000613
PG21	20	13.5	38	37	WNC-PG21/D20	0900000614
PG29	25	15	45.5	44	WNC-PG29/D25	0900000615
PG29	32	14	55	52	WNC-PG29/D32	0900000616
PG36	38	17	62	51	WNC-PG36/D38	0900000617
PG42	38	17	62	51	WNC-PG42/D38	0900000618
PG48	51	19	77.5	56	WNC-PG48/D51	0900000619
M 公制螺纹 Metric Thread						
M16x1.5	8	8	24	28	WNC-M16/D8	1900000610
M16x1.5	10	8	25.5	30	WNC-M16/D10	1900000611
M20x1.5	12	10	27.5	32	WNC-M20/D12	1900000612
M24x1.5	15	11.5	32	34	WNC-M24/D15	1900000613
M30x2.0	20	13	38	37	WNC-M30/D20	1900000614
M36x2.0	25	13	45	44	WNC-M36/D25	1900000615



## 电缆接头Cable glands


## 快速软管接头 Quick tube connector

材料: 尼龙

Material: Nylon 6

温度范围: -40°C...+120°C

Temperature range: -40°C...+120°C


 单位: mm  
Unit: mm

螺纹尺寸 Thread size	配用软管(d) Fits to tubing size(d)	螺纹长度(GL) Thread length(GL)	内孔(D1) Bore(D1)	外圆直径(D) External diameter(D)	总长(L) Total length(L)	型号(黑色) Designation(Black)	订货号 Order NO.
PG制螺纹 PG Thread							
PG7	AD10.0	9.5	7.5	17.0	34.5	WNCP-PG7B	0900000710
PG9	AD13.0	9.5	11.5	20.0	34.5	WNCP-PG9B	0900000711
PG11	AD15.8	9.5	14.0	23.0	36.0	WNCP-PG11B	0900000712
PG13.5	AD18.5	11.0	16.0	26.0	39.0	WNCP-PG13.5B	0900000713
PG16	AD21.2	13.0	18.0	29.5	44.0	WNCP-PG16B	0900000714
PG21	AD28.5	13.0	23.5	37.0	47.0	WNCP-PG21B	0900000715
PG29	AD34.5	11.5	30.5	43.5	47.0	WNCP-PG29B	0900000716
PG36	AD42.5	13.5	40.0	51.0	52.0	WNCP-PG36B	0900000717
M 公制螺纹 Metric Thread							
M12x1.5	AD10.0	10.0	8.0	17.0	34.5	WNCP-M12B	1900000710
M16x1.5	AD13.0	9.5	11.5	20.0	34.5	WNCP-M16B	1900000711
M18x1.5	AD15.8	9.5	14.0	23.0	36.0	WNCP-M18B	1900000712
M20x1.5	AD18.5	11.0	16.0	26.0	39.0	WNCP-M20B/AD18.5	1900000713
M20x1.5	AD21.2	13.0	15.0	29.5	44.0	WNCP-M20B/AD21.2	1900000714
M25x1.5	AD21.2	13.0	18.0	29.5	44.5	WNCP-M25B	1900000715
M25x1.5	AD28.5	13.0	20.5	37.0	47.0	WNCP-M25B/AD28.5	1900000716
M32x1.5	AD28.5	13.0	24.0	37.0	47.0	WNCP-M32B	1900000717
M40x1.5	AD34.5	11.0	30.0	43.5	48.0	WNCP-M40B	1900000718
M40x1.5	AD42.5	13.5	33.5	51.0	52.0	WNCP-M40B/AD42.5	1900000719
M50x1.5	AD54.5	13.5	42.5	63.5	53.5	WNCP-M50B/AD54.5	1900000720
M63x1.5	AD54.5	14.0	55.0	63.5	53.5	WNCP-M63B	1900000721



## 电缆接头Cable glands

## 塑料蒙盖 Nylon plug

材料：尼龙


Material : Nylon 6

温度范围：-40°C...+120°C

Temperature range: -40°C...+120°C

防护等级：IP68(在使用O型圈的情况下)

Degree of protection: IP68(with O-searing)


 单位：mm  
Unit: mm

螺纹尺寸 Thread size	螺纹长度(GL) Thread length(GL)	高度(H) Height(H)	螺纹外径(AG) Thread diameter(AG)	外圆直径(D) External dimension(D)	型号(灰白色) Designation(Grey)	订货号 Order NO.
PG制螺纹 PG Thread						
PG7	6.0	10.0	12.5	15.5	WNPP-PG7G/R	0900000810
PG9	6.0	10.0	15.2	18.5	WNPP-PG9G/R	0900000811
PG11	8.0	11.5	18.6	22.0	WNPP-PG11G/R	0900000812
PG13.5	8.0	11.5	20.4	24.0	WNPP-PG13.5G/R	0900000813
PG16	8.0	12.0	22.5	27.0	WNPP-PG16G/R	0900000814
PG21	7.5	12.0	28.3	33.0	WNPP-PG21G/R	0900000815
PG29	8.0	12.0	37.0	43.0	WNPP-PG29G/R	0900000816
PG36	10.5	14.0	47.0	55.0	WNPP-PG36G/R	0900000817
PG42	11.0	15.5	54.0	62.0	WNPP-PG42G/R	0900000818
PG48	13.0	17.0	59.3	68.5	WNPP-PG48G/R	0900000819
M 公制螺纹 Metric Thread						
M12x1.5	6.0	10.0	12.0	15.0	WNPP-M12G/R	1900000810
M16x1.5	5.5	10.0	16.0	18.5	WNPP-M16G/R	1900000811
M20x1.5	8.0	11.5	20.0	25.0	WNPP-M20G/R	1900000812
M25x1.5	7.5	12.5	25.0	29.5	WNPP-M25G/R	1900000813
M32x1.5	9.0	13.5	32.0	39.0	WNPP-M32G/R	1900000814
M40x1.5	11.0	15.0	40.0	48.0	WNPP-M40G/R	1900000815
M50x1.5	12.0	18.0	50.0	61.5	WNPP-M50G/R	1900000816
M63x1.5	12.5	18.0	63.0	70.5	WNPP-M63G/R	1900000817





## 电缆接头Cable glands

## 金属盖Metal plug

材料:黄铜镀镍


Material: Nickel-plate brass

温度范围: -40°C...+120°C

Temperature range: -40°C...+120°C

防护等级: IP68(在使用O型圈的情况下)

Degree of protection: IP68(with O-searing)


 单位: mm  
Unit: mm

螺纹尺寸 Thread size	螺纹长度(GL) Thread length(GL)	高度(H) Height(H)	螺纹外径(AG) Thread diameter(AG)	扳手尺寸(SW) Wrench size(SW)	型号(黑色) Designation(Black)	订货号 Order NO.
PG制螺纹 PG Thread						
PG7	5	8	12.5	14	WNP-PG7	0900000910
PG9	6	9	15.2	18	WNP-PG9	0900000911
PG11	6	10	18.6	20	WNP-PG11	0900000912
PG13.5	7	10	20.4	22	WNP-PG13.5	0900000913
PG16	7	10	22.5	24	WNP-PG16	0900000914
PG21	7	11	28.3	30	WNP-PG21	0900000915
PG29	8	13	37.0	40	WNP-PG29	0900000916
PG36	8	13	47.0	50	WNP-PG36	0900000917
PG42	9	15	54.0	55	WNP-PG42	0900000918
PG48	10	17	59.3	65	WNP-PG48	0900000919
M 公制螺纹 Metric Thread						
M12x1.5	5	8	12	14	WNP-M12	1900000910
M16x1.5	6	9	16	18	WNP-M16	1900000911
M18x1.5	6	10	18	20	WNP-M18	1900000912
M20x1.5	6	9.5	20	22	WNP-M20	1900000913
M22x1.5	7	10	22	24	WNP-M22	1900000914
M24x1.5	7	11	24	27	WNP-M24	1900000915
M25x1.5	7	11	25	27	WNP-M25	1900000916
M32x1.5	7	11	32	35	WNP-M32	1900000917
M36x1.5	8	12	36	40	WNP-M36	1900000918
M40x1.5	8	13	40	45	WNP-M40	1900000919
M48x1.5	9	15	48	50	WNP-M48	1900000920
M50x1.5	9	13	50	55	WNP-M50	1900000921
M63x1.5	10	17	63	70	WNP-M63	1900000922



## 电缆接头Cable glands

## 金属扩径环 Metal enlargement

材料：黄铜镀镍



Material : Nickel-plate brass

形状：圆形，六角

Shape: Round, Hexagonal

使用场合：适用于需要装螺纹直径扩大的场合

Applications: Apply to the situation of the diameter need to be reduced


 六角金属扩径环  
Hexagonal metal enlargement

 圆形金属扩径环  
Round metal enlargement

 单位：mm  
Unit: mm

外螺纹(AG) Outside thread (AG)	内螺纹(LG) Inside thread(LG)	外螺纹长度(L1) Outsidethread length(L1)	内螺纹长度(L2) Insidethread length(L2)	扳手尺寸(SW) Wrench size (SW)	型号(六角) Designation (Hexagonal)	订货号 Order NO.	型号(圆形) Designation (Round)	订货号 Order NO.
PG制螺纹 PG Thread		六角/圆形 Round/Hexagonal	六角/圆形 Round/Hexagonal	六角 Hexagonal				
PG7	PG9	5.0/5.0	8.0/10.0	17	WNSC-PG7PG9	09000001010	WNSC-PG7GPG9R	09000001019
PG9	PG11	6.0/6.0	10.0/12.0	20	WNSC-PG9PG11	09000001011	WNSC-PG9GPG11R	09000001020
PG11	PG13.5	6.0/6.0	10.0/12.0	22	WNSC-PG11PG13.5	09000001012	WNSC-PG11GPG13.5R	09000001021
PG13.5	PG16	6.5/6.5	11.0/13.0	24	WNSC-PG13.5PG16	09000001013	WNSC-PG13.5GPG16R	09000001022
PG16	PG21	6.5/6.5	12.0/14.0	30	WNSC-PG16PG21	09000001014	WNSC-PG16GPG21R	09000001023
PG21	PG29	8.0/7.0	13.5/15.0	40	WNSC-PG21PG29	09000001015	WNSC-PG21GPG29R	09000001024
PG29	PG36	8.0/8.0	15.5/17.0	50	WNSC-PG29PG36	09000001016	WNSC-PG29GPG36R	09000001025
PG36	PG42	9.0/9.0	14.5/16.0	57	WNSC-PG36PG42	09000001017	WNSC-PG36GPG42R	09000001026
PG42	PG48	10.0/10.0	14.5/16.0	65	WNSC-PG42PG48	09000001018	WNSC-PG42GPG48R	09000001027
M 公制螺纹 Metric Thread								
M12x1.5	M16x1.5	5.0/5.0	8.0/10.0	18	WNSC-M12M16	19000001010	WNSC-M12M16R	19000001017
M16x1.5	M20x1.5	6.0/6.0	10.0/12.0	22	WNSC-M16M20	19000001011	WNSC-M16M20R	19000001018
M20x1.5	M25x1.5	8.0/6.5	13.5/11.0	27	WNSC-M20M25	19000001012	WNSC-M20M25R	19000001019
M25x1.5	M32x2.0	7.5/6.5	13.5/12.0	35	WNSC-M25M32	19000001013	WNSC-M25M32R	19000001020
M32x1.5	M40x2.0	10.0/7.0	13.5/15.0	45	WNSC-M32M40	19000001014	WNSC-M32M40R	19000001021
M40x1.5	M50x2.0	10.0/9.0	14.5/18.0	55	WNSC-M40M50	19000001015	WNSC-M40M50R	19000001022
M50x1.5	M63x2.0	9.0/9.0	14.5/16.0	65	WNSC-M50M63	19000001016	WNSC-M50M63R	19000001023



## 电缆接头Cable glands

## 尼龙扩径环 Polyamide enlargement

材料:尼龙


Material: Polyamide

颜色: 灰白色、黑色

Color: Grey、Black

温度范围: -40°C...+100°C

Temperature range: -40°C...+100°C


 单位: mm  
Unit: mm

外螺纹(AG) Outside thread (AG)	内螺纹(LG) Insidethread(LG)	外螺纹长度(L1) Outsidethread length(L1)	总长度(L2) Total length(L2)	扳手尺寸(SW) Wrench size(SW)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG7	PG9	8	20	19	WNSCP-PG7PG9	09000001110
PG9	PG11	10	24	22	WNSCP-PG9PG11	09000001111
PG11	PG13.5	8	23	24	WNSCP-PG11PG13.5	09000001112
PG13.5	PG16	8	25	27	WNSCP-PG13.5PG16	09000001113
PG16	PG21	10	27	30	WNSCP-PG16PG21	09000001114
PG21	PG29	11	32	42	WNSCP-PG21PG29	09000001115
PG29	PG36	11	35	52	WNSCP-PG29PG36	09000001116
PG36	PG42	13	42	60	WNSCP-PG36PG42	09000001117
PG42	PG48	15	65	65	WNSCP-PG42PG48	09000001118
M 公制螺纹 Metric Thread						
M12x1.5	M16x1.5	8	22	20	WNSCP-M12M16	19000001110
M16x1.5	M20x1.5	10	27	27	WNSCP-M16M20	19000001111
M20x1.5	M25x1.5	8	25	30	WNSCP-M20M25	19000001112
M25x1.5	M32x1.5	11	30	36	WNSCP-M25M32	19000001113
M32x1.5	M40x1.5	15	34	45	WNSCP-M32M40	19000001114
M40x1.5	M50x1.5	13	37	55	WNSCP-M40M50	19000001115



## 电缆接头Cable glands

## 金属减径环 Metal reducer

材料：黄铜镀镍


Material: Nickel-plate brass

形状：六角

Shape: Round, Hexagonal

使用场合：适用于需要装螺纹直径减小的场合

Applications: Apply to the situation of the diameter need to be reduced


 单位：mm  
Unit: mm

外螺纹(AG) Outside thread (AG)	内螺纹(LG) Insidethread(LG)	外螺纹长度(L1) Outsidethread length(L1)	总长(H) Total length(H)	扳手尺寸(SW) Wrench size(SW)	型号(六角) Designation (Hexagonal)	订货号 Order NO.
PG制螺纹 PG Thread						
PG9	PG7	6.0	9	17	WNSC-PG9PG7	09000001210
PG11	PG9	7.0	11	20	WNSC-PG11PG9	09000001211
PG13.5	PG11	7.0	10	22	WNSC-PG13.5PG11	09000001213
PG16	PG13.5	7.0	11	24	WNSC-PG16PG13.5	09000001214
PG21	PG16	7.0	11	30	WNSC-PG21PG16	09000001215
PG29	PG21	8.0	13	40	WNSC-PG29PG21	09000001216
PG36	PG29	9.0	13	50	WNSC-PG36PG29	09000001217
PG42	PG36	9.0	15	57	WNSC-PG42PG36	09000001218
PG48	PG42	10.0	15	65	WNSC-PG48PG42	09000001219
M 公制螺纹 Metric Thread						
M16x1.5	M12x1.5	6.0	9	17	WNSC-M16M12	19000001210
M20x1.5	M16x1.5	7.0	10	22	WNSC-M20M16	19000001211
M25x1.5	M20x1.5	7.0	10	27	WNSC-M25M20	19000001212
M32x2.0	M25x1.5	8.0	11.5	35	WNSC-M32M25	19000001213
M40x2.0	M32x2.0	9.0	13	42	WNSC-M40M32	19000001214
M50x2.0	M40x2.0	9.0	14	57	WNSC-M50M40	19000001215
M63x2.0	M50x2.0	11.0	14	65	WNSC-M63M50	19000001216



## 电缆接头Cable glands

## 尼龙减径环 Polyamide reducer

材料:尼龙66


Material : Polyamide

颜色: 黑色

Color: Black

温度范围: -40°C...+100°C

Temperature range: -40°C...+100°C


 单位: mm  
Unit: mm

外螺纹(AG) Outside thread (AG)	内螺纹(LG) Insidethread(LG)	外螺纹长度(GL) Outsidethread length(GL)	总长(H) Total length(H)	扳手尺寸(SW) Wrench size(SW)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG11	PG9	8	15	24	WNSCP-PG11PG9	09000001310
PG13.5	PG11	9	21.5	22	WNSCP-PG13.5PG11	09000001311
PG16	PG11	10	16	27	WNSCP-PG16PG11	09000001312
PG16	PG13.5	10	17	27	WNSCP-PG16PG13.5	09000001313
PG21	PG16	11	17	39	WNSCP-PG21PG16	09000001314
PG29	PG21	11.5	17	39	WNSCP-PG29PG21	09000001315
M 公制螺纹 Metric Thread						
M20x1.5	M16x1.5	9.5	15	24	WNSCP-M20M16	19000001310
M25x1.5	M20x1.5	10	17	27	WNSCP-M25M20	19000001311
M32x1.5	M20x1.5	11.5	17	39	WNSCP-M32M20	19000001312
M32x1.5	M25x1.5	11	17	39	WNSCP-M32M25	19000001313
M40x1.5	M32x1.5	11	17	45	WNSCP-M40M32	19000001314

## 电缆接头Cable glands


### 金属螺母Metal lock nut

材料：黄铜镀镍

Material: Nickel-plate brass

温度范围：-40°C...+100°C

Temperature range: -40°C...+100°C



单位：mm  
Unit: mm


螺纹尺寸 Thread size	扳手尺寸(SW) Wrench size(SW)	厚度(H) Thickness(H)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread				
PG7	15	2.8	WNA-PG7/S	09000001410
PG9	18	2.8	WNA-PG9/S	09000001411
PG11	21	3.0	WNA-PG11/S	09000001412
PG13.5	22	3.0	WNA-PG13.5/S	09000001413
PG16	24	3.0	WNA-PG16/S	09000001414
PG21	30	3.5	WNA-PG21/S	09000001415
PG29	40	4.0	WNA-PG29/S	09000001416
PG36	50	4.5	WNA-PG36/S	09000001417
PG42	57	5.0	WNA-PG42/S	09000001418
PG48	65	5.5	WNA-PG48/S	09000001419
M 公制螺纹 Metric Thread				
M12x1.5	15	2.8	WNA-M12/S	19000001410
M16x1.5	18	2.8	WNA-M16/S	19000001411
M20x1.5	22	3.0	WNA-M20/S	19000001412
M25x1.5	27	3.0	WNA-M25/S	19000001413
M32x2.0	35	3.5	WNA-M32/S	19000001414
M40x2.0	50	4.5	WNA-M40/S	19000001415
M50x2.0	57	5.0	WNA-M50/S	19000001416
M63x2.0	70	5.5	WNA-M63/S	19000001417



## 电缆接头Cable glands

## 尼龙螺母 Polyamide lock nut

材料:尼龙66	Material: Polyamide
颜色: 灰色、黑色	Color: Grey,Black
温度范围: -40°C...+100°C	Temperature range: -40°C...+100°C


 单位: mm  
Unit: mm

螺纹尺寸 Thread size	扳手尺寸(SW) Wrench size(SW)	厚度(H) Thickness(H)	型号(灰色) Designation(Grey)	订货号 Order NO.	型号(黑色) Designation(Black)	订货号 Order NO.
PG制螺纹 PG Thread						
PG7	19	5.0	WNAP-PG7G/S	09000001510	WNAP-PG7B/S	09000001520
PG9	22	5.0	WNAP-PG9G/S	09000001511	WNAP-PG9B/S	09000001521
PG11	24	5.0	WNAP-PG11G/S	09000001512	WNAP-PG11B/S	09000001522
PG13.5	27	6.0	WNAP-PG13.5G/S	09000001513	WNAP-PG13.5B/S	09000001523
PG16	30	6.0	WNAP-PG16G/S	09000001514	WNAP-PG16B/S	09000001524
PG21	36	7.0	WNAP-PG21G/S	09000001515	WNAP-PG21B/S	09000001525
PG29	45	7.0	WNAP-PG29G/S	09000001516	WNAP-PG29B/S	09000001526
PG36	59	8.0	WNAP-PG36G/S	09000001517	WNAP-PG36B/S	09000001527
PG42	65	8.0	WNAP-PG42G/S	09000001518	WNAP-PG42B/S	09000001528
PG48	70	8.0	WNAP-PG48G/S	09000001519	WNAP-PG48B/S	09000001529
M 公制螺纹 Metric Thread						
M12x1.5	19	5.0	WNAP-M12G/S	19000001510	WNAP-M12B/S	19000001521
M16x1.5	22	5.0	WNAP-M16G/S	19000001511	WNAP-M16B/S	19000001522
M18x1.5	24	5.0	WNAP-M18G/S	19000001512	WNAP-M18B/S	19000001523
M20x1.5	27	6.0	WNAP-M20G/S	19000001513	WNAP-M20B/S	19000001524
M22x1.5	30	6.0	WNAP-M22G/S	19000001514	WNAP-M22B/S	19000001525
M24x1.5	30	6.0	WNAP-M24G/S	19000001515	WNAP-M24B/S	19000001526
M25x1.5	32	7.0	WNAP-M25G/S	19000001516	WNAP-M25B/S	19000001527
M32x1.5	40	7.0	WNAP-M32G/S	19000001517	WNAP-M32B/S	19000001528
M40x1.5	49	8.0	WNAP-M40G/S	19000001518	WNAP-M40B/S	19000001529
M50x1.5	65	8.0	WNAP-M50G/S	19000001519	WNAP-M50B/S	19000001530
M63x1.5	74	8.0	WNAP-M63G/S	19000001520	WNAP-M63B/S	19000001531