




电缆接头Cable glands

普通金属防水电缆接头 Plastic cable gland

材料：黄铜镀镍	Material: Nickel-plated brass
密封件：尼龙6和丁晴橡胶	Sealing: Nylon and NBR
防护等级：IP68(要使用O型圈的情况下)	Degree of protection: IP68(with O-sealing)
温度范围：静态：-40 ~+100	Temperature range: Stat: -40 ~+100
动态：-20 ~+80	Dyn: -20 ~+80

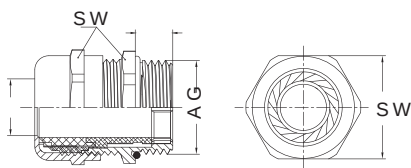

单位：mm
Unit: mm


螺纹尺寸 Thread size	卡口范围(Φ) Clamping range(Φ)	螺纹外径(AG) Thread diameter(AG)	扳手尺寸(SW) Wrench size(SW)	螺纹长度(GL) Thread length(GL)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG 7	3 - 6.5	12.5	14	6	WNA-PG 7(Φ3-6.5)	09000000110
PG 9	4 - 8	15.2	17	6.5	WNA-PG 9(Φ4-8)	09000000111
PG 11	5 - 10	18.6	20	7	WNA-PG 11(Φ5-10)	09000000112
PG 13.5	6 - 12	20.4	22	7.5	WNA-PG 13.5(Φ6-12)	09000000113
PG 16	8 - 14	22.5	24	7	WNA-PG 16(Φ8-14)	09000000114
PG 21	13 - 18	28.3	30	8	WNA-PG 21(Φ13-18)	09000000115
PG 29	18 - 25	37.0	40	9	WNA-PG 29(Φ18-25)	09000000116
PG 36	22 - 32	47.0	50	12	WNA-PG 36(Φ22-32)	09000000117
PG 42	31 - 38	54.0	57	12	WNA-PG 42(Φ31-38)	09000000118
PG 48	37 - 44	59.3	65	12	WNA-PG 48(Φ37-44)	09000000119
M公制螺纹 Metric Thread						
M12x1.5	3 - 6.5	12	14	6	WNA-M12(Φ3-6.5)	19000000110
M14x1.5	3 - 6.5	14	14	6	WNA-M14(Φ3-6.5)	19000000111
M16x1.5	4 - 8	16	17	6.5	WNA-M16(Φ4-8)	19000000112
M16x1.5	5 - 10	16	20	6	WNA-M16(Φ5-10)	19000000113
M16x1.5	5 - 10	18	20	7	WNA-M18(Φ5-10)	19000000114
M20x1.5	6 - 12	20	22	8	WNA-M20(Φ6-12)	19000000115
M20x1.5	8 - 14	20	24	8	WNA-M20(Φ8-14)	19000000116
M22x1.5	8 - 14	22	24	7.5	WNA-M22(Φ8-14)	19000000117
M25x1.5	9 - 16	25	27	7.5	WNA-M25(Φ9-16)	19000000118
M25x1.5	13 - 18	25	30	7.5	WNA-M25(Φ13-18)	19000000119
M32x1.5	15 - 22	32	35	8.5	WNA-M32(Φ15-22)	19000000120
M32x1.5	18 - 25	32	40	8.0	WNA-M32(Φ18-25)	19000000121
M40x1.5	18 - 25	40	45	12	WNA-M40(Φ18-25)	19000000122
M40x1.5	22 - 32	40	50	12	WNA-M40(Φ22-32)	19000000123
M50x1.5	22 - 32	50	57	12	WNA-M50(Φ22-32)	19000000124
M50x1.5	31 - 38	50	57	12	WNA-M50(Φ31-38)	19000000125
M63x1.5	37 - 44	63	65	12	WNA-M63(Φ37-44)	19000000126



电缆接头Cable glands

普通塑料防水电缆接头 Plastic cable gland

材料：尼龙	Material: Nylon
密封件：丁晴橡胶	Sealing: NBR
防护等级：IP68 (要使用O型圈的情况下)	Degree of protection: IP68 (with O-sealing)
温度范围：静态：-40 ~+100	Temperature range: Static: -40 ~+100
动态：-20 ~+80	Dyn: -20 ~+80

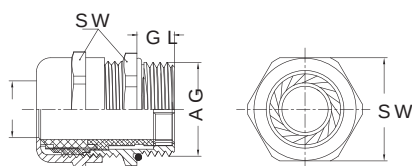

单位：mm
Unit: mm


螺纹尺寸 Thread size	卡口范围 (Φ) Clamping range (Φ)	螺纹外径 (AG) Thread dia (AG)	扳手尺寸 (SW) Wrench size (SW)	螺纹长度 (GL) Thread length (GL)	型号 (灰色) Designation (Grey)	型号 Designation	型号 (黑色) Designation (Black)	订货号 Order NO.
PG制螺纹 PG Thread								
PG 7	3 - 6.5	12.5	15	8.5	WNAP - PG 7G	09000000210	WNAP - PG 7B	09000000220
PG 9	4 - 8	15.2	19	8.0	WNAP - PG 9G	09000000211	WNAP - PG 9B	09000000221
PG 11	5 - 10	18.6	22	8.0	WNAP - PG 11G	09000000212	WNAP - PG 11B	09000000222
PG 13.5	6 - 12	20.4	24	10	WNAP - PG 13.5G	09000000213	WNAP - PG 13.5B	09000000223
PG 16	8 - 14	22.5	27	10	WNAP - PG 16G	09000000214	WNAP - PG 16B	09000000224
PG 21	13 - 18	28.3	33	11	WNAP - PG 21G	09000000215	WNAP - PG 21B	09000000225
PG 29	18 - 25	37.0	42	11	WNAP - PG 29G	09000000216	WNAP - PG 29B	09000000226
PG 36	22 - 32	47.0	52	13	WNAP - PG 36G	09000000217	WNAP - PG 36B	09000000227
PG 42	31 - 38	54.0	60	15	WNAP - PG 42G	09000000218	WNAP - PG 42B	09000000228
PG 48	37 - 44	59.3	65	14.0	WNAP - PG 48G	09000000219	WNAP - PG 48B	09000000229
M 公制螺纹 Metric Thread								
M 12x1.5	3 - 6.5	12	15	8	WNAP - M 12G	19000000210	WNAP - M 12B	19000000220
M 16x1.5	4 - 8	16	19	8	WNAP - M 16G	19000000211	WNAP - M 16B	19000000221
M 20x1.5	5 - 10	20	24	9	WNAP - M 20G	19000000212	WNAP - M 20B	19000000222
M 20x1.5	6 - 12	20	24	9	WNAP - M 20G D6-12	19000000213	WNAP - M 20B D6-12	19000000223
M 22x1.5	8 - 14	22	27	10	WNAP - M 22G	19000000214	WNAP - M 22B	19000000224
M 25x1.5	13 - 18	25	33	11	WNAP - M 25G	19000000215	WNAP - M 25B	19000000225
M 32x1.5	18 - 25	32	42	11	WNAP - M 32G	19000000216	WNAP - M 32B	19000000226
M 40x1.5	22 - 32	40	51	13	WNAP - M 40G	19000000217	WNAP - M 40B	19000000227
M 50x1.5	31 - 38	50	60	13	WNAP - M 50G	19000000218	WNAP - M 50B	19000000228
M 63x1.5	37 - 44	63	65	14	WNAP - M 63G	19000000219	WNAP - M 63B	19000000229



电缆接头Cable glands

双锁紧型金属电缆接头 Gland with external strain relief via calmping jaws

材料：黄铜镀镍（壳） 尼龙 PA66（衬套）	Material: Nickel-plated brass Nylon
防护等级：IP68（不使用O型圈的情况下）	Degree of protection: IP68 (with O-sealing)

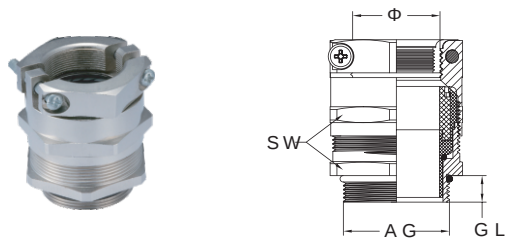


单位：mm Unit: mm						
螺纹尺寸 Thread size	卡口范围 (Φ) Clamping range (Φ)	螺纹外径 (AG) Thread diameter (AG)	扳手尺寸 (SW) Wrench size (SW)	螺纹长度 (GL) Thread length (GL)	型号 Designation	订货号 Order NO.
PG 制螺纹 PG Thread						
PG 9	4 - 8	15.2	17	7	WNKS-PG 9(4-8)	09000000310
PG 11	5 - 10	18.6	22	7	WNKS-PG 11(5-10)	09000000311
PG 13.5	6 - 12	20.4	22	8	WNKS-PG 13.5(6-12)	09000000312
PG 16	10 - 14	22.5	24	7.5	WNKS-PG 16(10-14)	09000000313
PG 21	13 - 18	28.3	30	8	WNKS-PG 21(13-18)	09000000314
PG 29	18 - 25	37.0	40	9	WNKS-PG 29(18-25)	09000000315
PG 36	22 - 32	47.0	50	12	WNKS-PG 36(22-32)	09000000316
PG 42	30 - 38	54.0	57	12	WNKS-PG 42(30-38)	09000000317
M 公制螺纹 Metric Thread						
M16x1.5	4 - 8	16	18	6.5	WNKS-M16(4-8)	19000000310
M16x1.5	5 - 10	16	22	6	WNKS-M16(5-10)	19000000311
M20x1.5	6 - 12	20	22	7.5	WNKS-M20(6-12)	19000000312
M25x1.5	10 - 16	25	27	8	WNKS-M25(10-16)	19000000313
M25x1.5	13 - 18	25	30	7.5	WNKS-M25(13-18)	19000000314
M32x1.5	16 - 22	32	35	8.5	WNKS-M32(16-22)	19000000315
M32x1.5	18 - 25	32	40	8	WNKS-M32(18-25)	19000000316
M40x1.5	22 - 30	40	45	12	WNKS-M40(22-30)	19000000317
M40x1.5	22 - 32	40	50	12	WNKS-M40(22-32)	19000000318
M50x1.5	30 - 38	50	57	12	WNKS-M50(30-38)	19000000319



电缆接头Cable glands

普通兼容金属防水接头 EMC Cable gland

材料：黄铜镀镍	Material: Nickel-plate brass
密封件：尼龙66和丁晴橡胶	Sealing: Nylon and NBR
防护等级：IP68(要使用O型圈的情况下)	Degree of protection: IP68(with O - searing)
温度范围：- 40 ~+100 ，短时间可以达到 120	Temperature range: - 40 ~+100 short- term 120

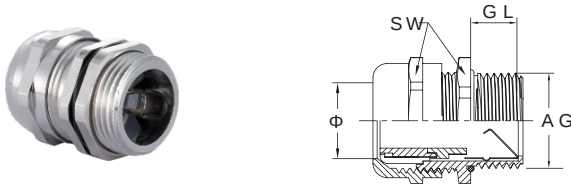

单位：mm
Unit: mm


螺纹尺寸 Thread size	卡口范围 (Φ) Clamping range (Φ)	螺纹外径 (AG) Thread diameter (AG)	扳手尺寸 (SW) Wrench size (SW)	螺纹长度 (GL) Thread length (GL)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG 7	3 - 6.5	12.5	14	5	WNAC - PG 7 (D 3 - 6.5)	09000000410
PG 9	4 - 8	15.2	18	6	WNAC - PG 9 (D 4 - 8)	09000000411
PG 11	5 - 10	18.6	20	6	WNAC - PG 11 (D 5 - 10)	09000000412
PG 13.5	6 - 12	20.4	24	7	WNAC - PG 13.5 (D 6 - 12)	09000000413
PG 16	8 - 14	22.5	24	7	WNAC - PG 16 (D 8 - 14)	09000000414
PG 21	13 - 18	28.3	30	8	WNAC - PG 21 (D 13 - 18)	09000000415
PG 29	18 - 25	37.0	40	8	WNAC - PG 29 (D 18 - 25)	09000000416
PG 36	22 - 32	47.0	50	9	WNAC - PG 36 (D 22 - 32)	09000000417
PG 42	30 - 38	54.0	57	9	WNAC - PG 42 (D 30 - 38)	09000000418
M 公制螺纹 Metric Thread						
M 12x1.5	3 - 6.5	12	14	5	WNAC - M 12 (D 3 - 6.5)	19000000410
M 16x1.5	4 - 8	16	20	6	WNAC - M 16 (D 4 - 8)	19000000411
M 18x1.5	5 - 10	18	20	6	WNAC - M 18 (D 5 - 10)	19000000412
M 20x1.5	6 - 12	20	24	7	WNAC - M 20 (D 6 - 12)	19000000413
M 24x1.5	8 - 14	24	27	7	WNAC - M 24 (D 8 - 14)	19000000414
M 25x1.5	10 - 16	25	27	12	WNAC - M 25 (D 10 - 16)	19000000415
M 25x1.5	13 - 18	25	30	13	WNAC - M 25 (D 13 - 18)	19000000416
M 30x1.5	13 - 18	30	35	8	WNAC - M 30 (D 13 - 18)	19000000417
M 32x1.5	15 - 22	32	40	13	WNAC - M 32 (D 15 - 22)	19000000418
M 32x1.5	18 - 25	32	40	13	WNAC - M 32 (D 18 - 25)	19000000419
M 36x1.5	18 - 25	36	40	8	WNAC - M 36 (D 18 - 25)	19000000420
M 40x1.5	21 - 30	40	45	9	WNAC - M 40 (D 21 - 30)	19000000421
M 40x1.5	22 - 32	40	50	9	WNAC - M 40 (D 22 - 32)	19000000422
M 48x1.5	22 - 32	48	50	9	WNAC - M 48 (D 22 - 32)	19000000423
M 50x1.5	30 - 38	50	57	9	WNAC - M 50 (D 30 - 38)	19000000424
M 56x1.5	30 - 38	56	57	9	WNAC - M 56 (D 30 - 38)	19000000425
M 63x1.5	37 - 44	63	65	10	WNAC - M 63 (D 37 - 44)	19000000426



电缆接头Cable glands

多芯金属防水电缆接头 Metal cable gland with multi core

材料：黄铜镀镍	Material：Nickel-plated brass
密封件：尼龙66和丁晴橡胶	Sealing：Nylon and NBR
防护等级：IP65	Degree of protection：IP65
温度范围：-40 ...+100，瞬间可以达到120	Temperature range：-40 ...+100 short-term 120

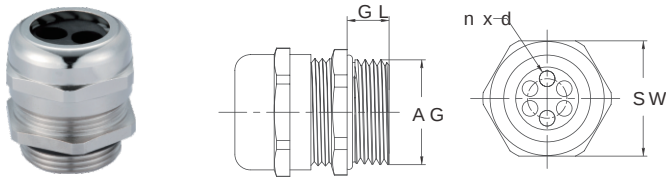

单位：mm
Unit: mm

螺纹尺寸 Thread size	卡口范围 (nxd) Clamp range (nxd)	螺纹外径 (AG) Thread diameter (AG)	扳手尺寸 (SW) Wrench size (SW)	螺纹长度 (GL) Thread length (GL)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG 9	2x3	15.2	17	6.7	WNAM-PG 9/(2x3)	09000000510
PG 21	4x6	28.3	30	8	WNAM-PG 21/(4x6)	09000000511
PG 21	3x7	28.3	30	8	WNAM-PG 21/(3x7)	09000000512
PG 21	2x6	28.3	30	8	WNAM-PG 21/(2x6)	09000000513
PG 21	2x7	28.3	30	8	WNAM-PG 21/(2x7)	09000000514
PG 21	2x8	28.3	30	8	WNAM-PG 21/(2x8)	09000000515
PG 29	4x9	37	40	9	WNAM-PG 29/(4x9)	09000000516
PG 36	5x9	47	50	12	WNAM-PG 36/(5x9)	09000000517
M公制螺纹 Metric Thread						
M16x1.5	2x3	16	17	6.5	WNAM-M 16/(2x3)	19000000510
M20x1.5	6x3	20	22	8	WNAM-M 20/(6x3)	19000000511
M20x1.5	2x5	20	22	8	WNAM-M 20/(2x5)	19000000512
M25x1.5	2x7	25	30	7.5	WNAM-M 25/(2x7)	19000000513
M25x1.5	4x6	25	30	7.5	WNAM-M 25/(4x6)	19000000514
M25x1.5	3x7	25	30	7.5	WNAM-M 25/(3x7)	19000000515
M25x1.5	2x8	33	30	7.5	WNAM-M 25/(2x8)	19000000516
M32x1.5	4x9	32	40	8	WNAM-M 32/(4x9)	19000000517
M40x1.5	5x9	40	50	12	WNAM-M 40/(5x9)	19000000518
M40x1.5	2x15	40	50	12	WNAM-M 40/(2x15)	19000000519



电缆接头Cable glands

外螺纹金属软管接头 Outer thread tube connector

材料：锌合金镀锌或镀铬

Material: Zinc alloy Zinc plated or Chromium plated

密封件：一端连接软管，另一端由螺纹连接箱体或设备，


Specialty: one end is connector to flexible tube, the other thread end

具有结构紧凑，耐腐蚀等特点

connected to switch chest or equipment, the structure is compact, the surface is anti-rust

应用场合：电机、电缆桥架、电气工程安装、电控箱等

Applications: Electric motor, Cable bridge frame, Electric engineering, Electric control etc.



单位：mm
Unit: mm


螺纹尺寸 Thread size	配用软管(d) Fits of tubing size(d)	螺纹长度(GL) Thread length(GL)	外圆直径(D) External diameter(D)	高度(GL) Height(GL)	型号 Designation	订货号 Order NO.
PG制螺纹 PG Thread						
PG 9	10	8.5	26	30	WNC-PG 9 D10	09000000610
PG 11	12	10.5	27.5	32	WNC-PG 11 D12	09000000611
PG 13.5	15	11.5	31.5	34	WNC-PG 13.5 D15	09000000612
PG 16	15	12.5	32	34	WNC-PG 16 D15	09000000613
PG 21	20	13.5	38	37	WNC-PG 21 D20	09000000614
PG 29	25	15	45.5	44	WNC-PG 29 D25	09000000615
PG 29	32	14	55	52	WNC-PG 29 D32	09000000616
PG 36	38	17	62	51	WNC-PG 36 D38	09000000617
PG 42	38	17	62	51	WNC-PG 42 D38	09000000618
PG 48	51	19	77.5	56	WNC-PG 48 D51	09000000619
M 公制螺纹 Metric Thread						
M 16x1.5	8	8	24	28	WNC-M 16 D8	19000000610
M 16x1.5	10	8	25.5	30	WNC-M 16 D10	19000000611
M 20x1.5	12	10	27.5	32	WNC-M 20 D12	19000000612
M 24x1.5	15	11.5	32	34	WNC-M 24 D15	19000000613
M 30x2.0	20	13	38	37	WNC-M 30 D20	19000000614
M 36x2.0	25	13	45	44	WNC-M 36 D25	19000000615



电缆接头Cable glands

快速软管接头 Quick tube connector

材料：尼龙	Material: Nylon 6
温度范围：- 40 ...+120	Temperature range：- 40 ...+120



							单位：mm Unit: mm
螺纹尺寸 Thread size	配用软管 (d) Fitting (d)	螺纹长度 (GL) (Thread length GL)	内孔 (D1) Bore (D1)	外圆直径 (D) External diameter (D)	总长 (L) Total length (L)	型号 (背面) Designation (Back)	订货号 Order NO.
PG制螺纹 PG Thread							
PG 7	AD10.0	9.5	7.5	17.0	34.5	WNCP-PG 7B	09000000710
PG 9	AD13.0	9.5	11.5	20.0	34.5	WNCP-PG 9B	09000000711
PG 11	AD15.8	9.5	14.0	23.0	36.0	WNCP-PG 11B	09000000712
PG 13.5	AD18.5	11.0	16.0	26.0	39.0	WNCP-PG 13.5B	09000000713
PG 16	AD21.2	13.0	18.0	29.5	44.0	WNCP-PG 16B	09000000714
PG 21	AD28.5	13.0	23.5	37.0	47.0	WNCP-PG 21B	09000000715
PG 29	AD34.5	11.5	30.5	43.5	47.0	WNCP-PG 29B	09000000716
PG 36	AD42.5	13.5	40.0	51.0	52.0	WNCP-PG 36B	09000000717
M 公制螺纹 Metric Thread							
M12x1.5	AD10.0	10.0	8.0	17.0	34.5	WNCP-M12B	19000000710
M16x1.5	AD13.0	9.5	11.5	20.0	34.5	WNCP-M16B	19000000711
M18x1.5	AD15.8	9.5	14.0	23.0	36.0	WNCP-M18B	19000000712
M20x1.5	AD18.5	11.0	16.0	26.0	39.0	WNCP-M20B AD18.5	19000000713
M20x1.5	AD21.2	13.0	15.0	29.5	44.0	WNCP-M20B AD21.2	19000000714
M25x1.5	AD21.2	13.0	18.0	29.5	44.5	WNCP-M25B	19000000715
M25x1.5	AD28.5	13.0	20.5	37.0	47.0	WNCP - M25B / M28.5	19000000716
M32x1.5	AD28.5	13.0	24.0	37.0	47.0	WNCP-M32B	19000000717
M40x1.5	AD34.5	11.0	30.0	43.5	48.0	WNCP-M40B	19000000718
M40x1.5	AD42.5	13.5	33.5	51.0	52.0	WNCP - M40B / M42.5	19000000719
M50x1.5	AD54.5	13.5	42.5	63.5	53.5	WNCP - M50B / M54.5	19000000720
M63x1.5	AD54.5	14.0	55.0	63.5	53.5	WNCP-M63B	19000000721



电缆接头Cable glands

塑料蒙盖 Nylon plug

材料：尼龙


Material: Nylon 6

温度范围：- 40 ...+120

Temperature range: - 40 ...+120

防护等级：IP68 (不使用O型圈的情况下)

Degree of protection: IP68 (w ith O - searing)



单位：mm
Unit: mm


螺纹尺寸 Thread size	螺纹长度 (GL) Thread length (GL)	高度 (H) Height (H)	螺纹外径 (AG) Thread diameter (AG)	外圆直径 (D) External diameter (D)	型号 (灰色) Designation (Grey)	订货号 Order NO.
PG制螺纹 PG Thread						
PG 7	6.0	10.0	12.5	15.5	WNPP-PG 7G R	09000000810
PG 9	6.0	10.0	15.2	18.5	WNPP-PG 9G R	09000000811
PG 11	8.0	11.5	18.6	22.0	WNPP-PG 11G R	09000000812
PG 13.5	8.0	11.5	20.4	24.0	WNPP-PG 13.5G R	09000000813
PG 16	8.0	12.0	22.5	27.0	WNPP-PG 16G R	09000000814
PG 21	7.5	12.0	28.3	33.0	WNPP-PG 21G R	09000000815
PG 29	8.0	12.0	37.0	43.0	WNPP-PG 29G R	09000000816
PG 36	10.5	14.0	47.0	55.0	WNPP-PG 36G R	09000000817
PG 42	11.0	15.5	54.0	62.0	WNPP-PG 42G R	09000000818
PG 48	13.0	17.0	59.3	68.5	WNPP-PG 48G R	09000000819
M 公制螺纹 Metric Thread						
M 12x1.5	6.0	10.0	12.0	15.0	WNPP-M 12G R	19000000810
M 16x1.5	5.5	10.0	16.0	18.5	WNPP-M 16G R	19000000811
M 20x1.5	8.0	11.5	20.0	25.0	WNPP-M 20G R	19000000812
M 25x1.5	7.5	12.5	25.0	29.5	WNPP-M 25G R	19000000813
M 32x1.5	9.0	13.5	32.0	39.0	WNPP-M 32G R	19000000814
M 40x1.5	11.0	15.0	40.0	48.0	WNPP-M 40G R	19000000815
M 50x1.5	12.0	18.0	50.0	61.5	WNPP-M 50G R	19000000816
M 63x1.5	12.5	18.0	63.0	70.5	WNPP-M 63G R	19000000817



电缆接头Cable glands

金属盖Metal plug

材料：黄铜镀镍	Material: Nickel-plated brass
温度范围：-40...+120	Temperature range: -40...+120
防护等级：IP68(在使用O型圈的情况下)	Degree of protection: IP68(with O-sealing)



单位：mm Unit: mm						
螺纹尺寸 Thread size	螺纹长度 (GL) Thread length (GL)	高度 (H) Height (H)	螺纹外径 (AG) Thread diameter (AG)	扳手尺寸 (SW) Wrench size (SW)	型号 (代号) Designation (Blender NO.)	订货号
PG 制螺纹 PG Thread						
PG 7	5	8	12.5	14	WNP-PG 7	09000000910
PG 9	6	9	15.2	18	WNP-PG 9	09000000911
PG 11	6	10	18.6	20	WNP-PG 11	09000000912
PG 13.5	7	10	20.4	22	WNP-PG 13.5	09000000913
PG 16	7	10	22.5	24	WNP-PG 16	09000000914
PG 21	7	11	28.3	30	WNP-PG 21	09000000915
PG 29	8	13	37.0	40	WNP-PG 29	09000000916
PG 36	8	13	47.0	50	WNP-PG 36	09000000917
PG 42	9	15	54.0	55	WNP-PG 42	09000000918
PG 48	10	17	59.3	65	WNP-PG 48	09000000919
M 公制螺纹 Metric Thread						
M 12x1.5	5	8	12	14	WNP-M 12	19000000910
M 16x1.5	6	9	16	18	WNP-M 16	19000000911
M 18x1.5	6	10	18	20	WNP-M 18	19000000912
M 20x1.5	6	9.5	20	22	WNP-M 20	19000000913
M 22x1.5	7	10	22	24	WNP-M 22	19000000914
M 24x1.5	7	11	24	27	WNP-M 24	19000000915
M 25x1.5	7	11	25	27	WNP-M 25	19000000916
M 32x1.5	7	11	32	35	WNP-M 32	19000000917
M 36x1.5	8	12	36	40	WNP-M 36	19000000918
M 40x1.5	8	13	40	45	WNP-M 40	19000000919
M 48x1.5	9	15	48	50	WNP-M 48	19000000920
M 50x1.5	9	13	50	55	WNP-M 50	19000000921
M 63x1.5	10	17	63	70	WNP-M 63	19000000922



电缆接头Cable glands

金属扩径环 Metal enlargement

材料：黄铜镀镍


Material: Nickel-plate brass

形状：圆形，六角


Shape: Round, Hexagonal

使用场合：适用于需要装螺纹直径扩大的场合

Applications: Apply to the situation of the diameter need to be reduced



六角金属扩径环
Hexagonal metal enlargement



圆形金属扩径环
Round metal enlargement

单位：mm
Unit: mm


外螺纹 (AG) Outside thread (AG)	内螺纹 (LG) Inside thread (LG)	外螺纹长度 (L1) Outside thread length (L1)	内螺纹长度 (L2) Inside thread length (L2)	扳手尺寸 (S / W) Wrench size (S / W)	型号 (六角) Designation (Hexagonal)	订货号 Order ON	型号 (圆形) Designation (Round)	订货号 Order ON
PG制螺纹 PG Thread		六角 / 圆形 Round Hexagonal	六角 / 圆形 Round Hexagonal	六角 Hexagonal				
PG 7	PG 9	5.0/5.0	8.0/10.0	17	WNSC-PG 7PG 9	09000001010	WNSC-PG 7 G P G 9	09000001019
PG 9	PG 11	6.0/6.0	10.0/12.0	20	WNSC-PG 9PG 11	09000001011	WNSC-PG 9 G P G 11	09000001020
PG 11	PG 13.5	6.0/6.0	10.0/12.0	22	WNSC-PG 11PG 13.5	09000001012	WNSC-PG 11 G P G 13.5R	09000001021
PG 13.5	PG 16	6.5/6.5	11.0/13.0	24	WNSC-PG 13.5PG 16	09000001013	WNSC-PG 13.5 G P G 16R	09000001022
PG 16	PG 21	6.5/6.5	12.0/14.0	30	WNSC-PG 16PG 21	09000001014	WNSC-PG 16 G P G 21	09000001023
PG 21	PG 29	8.0/7.0	13.5/15.0	40	WNSC-PG 21PG 29	09000001015	WNSC-PG 21 G P G 29	09000001024
PG 29	PG 36	8.0/8.0	15.5/17.0	50	WNSC-PG 29PG 36	09000001016	WNSC-PG 29 G P G 36	09000001025
PG 36	PG 42	9.0/9.0	14.5/16.0	57	WNSC-PG 36PG 42	09000001017	WNSC-PG 36 G P G 42	09000001026
PG 42	PG 48	10.0/10.0	14.5/16.0	65	WNSC-PG 42PG 48	09000001018	WNSC-PG 42 G P G 48	09000001027
M制螺纹 Metric Thread								
M 12x1.5	M 16x1.5	5.0/5.0	8.0/10.0	18	WNSC-M 12M 16	19000001010	WNSC-M 12 M 16 R	19000001017
M 16x1.5	M 20x1.5	6.0/6.0	10.0/12.0	22	WNSC-M 16M 20	19000001011	WNSC-M 16 M 20 R	19000001018
M 20x1.5	M 25x1.5	8.0/6.5	13.5/11.0	27	WNSC-M 20M 25	19000001012	WNSC-M 20 M 25 R	19000001019
M 25x1.5	M 32x2.0	7.5/6.5	13.5/12.0	35	WNSC-M 25M 32	19000001013	WNSC-M 25 M 32 R	19000001020
M 32x1.5	M 40x2.0	10.0/7.0	13.5/15.0	45	WNSC-M 32M 40	19000001014	WNSC-M 32 M 40 R	19000001021
M 40x1.5	M 50x2.0	10.0/9.0	14.5/18.0	55	WNSC-M 40M 50	19000001015	WNSC-M 40 M 50 R	19000001022
M 50x1.5	M 63x2.0	9.0/9.0	14.5/16.0	65	WNSC-M 50M 63	19000001016	WNSC-M 50 M 63 R	19000001023



电缆接头Cable glands

尼龙扩径环 Polyamide enlargement

材料：尼龙	Material: Polyamide
颜色：灰白色、黑色	Color: Grey、Black
温度范围：- 40 ...+100	Temperature range: - 40 ...+100



单位：mm Unit: mm						
外螺纹 (AG) Outside thread (AG)	内螺纹 (LG) Inside thread (LG)	外螺纹长度 (L1) Outside thread length (L1)	总长度 (L2) Total length (L2)	扳手尺寸 (SW) Wrench size (SW)	型号 Designation	订货号 Order NO.
PG 制螺纹 PG Thread						
PG 7	PG 9	8	20	19	WN SCP - PG 7PG 9	09000001110
PG 9	PG 11	10	24	22	WN SCP - PG 9PG 11	09000001111
PG 11	PG 13.5	8	23	24	WN SCP - PG 11PG 13.5	09000001112
PG 13.5	PG 16	8	25	27	WN SCP - PG 13.5PG 16	09000001113
PG 16	PG 21	10	27	30	WN SCP - PG 16PG 21	09000001114
PG 21	PG 29	11	32	42	WN SCP - PG 21PG 29	09000001115
PG 29	PG 36	11	35	52	WN SCP - PG 29PG 36	09000001116
PG 36	PG 42	13	42	60	WN SCP - PG 36PG 42	09000001117
PG 42	PG 48	15	65	65	WN SCP - PG 42PG 48	09000001118
M 公制螺纹 Metric Thread						
M 12x1.5	M 16x1.5	8	22	20	WN SCP - M 12M 16	19000001110
M 16x1.5	M 20x1.5	10	27	27	WN SCP - M 16M 20	19000001111
M 20x1.5	M 25x1.5	8	25	30	WN SCP - M 20M 25	19000001112
M 25x1.5	M 32x1.5	11	30	36	WN SCP - M 25M 32	19000001113
M 32x1.5	M 40x1.5	15	34	45	WN SCP - M 32M 40	19000001114
M 40x1.5	M 50x1.5	13	37	55	WN SCP - M 40M 50	19000001115



电缆接头Cable glands

金属减径环 Metal reducer

材料：黄铜镀镍


Material: Nickel-plated brass

形状：六角

Shape: Round, Hexagonal

使用场合：适用于需要装螺纹直径减小的场合

Applications: Apply to the situation of the diameter need to be reduced



单位：mm
Unit: mm


外螺纹 (AG) Outside thread (AG)	内螺纹 (LG) Inside thread (LG)	外螺纹长度 (L1) Outside thread length (L1)	总长 (H) Total length (H)	扳手尺寸 (SW) Wrench size (SW)	型号 (六角) Designation (Hexagonal)	订货号 Order NO.
PG制螺纹 PG Thread						
PG 9	PG 7	6.0	9	17	WNSC - PG 9PG 7	09000001210
PG 11	PG 9	7.0	11	20	WNSC - PG 11PG 9	09000001211
PG 13.5	PG 11	7.0	10	22	WNSC - PG 13.5PG 11	09000001213
PG 16	PG 13.5	7.0	11	24	WNSC - PG 16PG 13.5	09000001214
PG 21	PG 16	7.0	11	30	WNSC - PG 21PG 16	09000001215
PG 29	PG 21	8.0	13	40	WNSC - PG 29PG 21	09000001216
PG 36	PG 29	9.0	13	50	WNSC - PG 36PG 29	09000001217
PG 42	PG 36	9.0	15	57	WNSC - PG 42PG 36	09000001218
PG 48	PG 42	10.0	15	65	WNSC - PG 48PG 42	09000001219
M 公制螺纹 Metric Thread						
M 16x1.5	M 12x1.5	6.0	9	17	WNSC - M 16M 12	19000001210
M 20x1.5	M 16x1.5	7.0	10	22	WNSC - M 20M 16	19000001211
M 25x1.5	M 20x1.5	7.0	10	27	WNSC - M 25M 20	19000001212
M 32x2.0	M 25x1.5	8.0	11.5	35	WNSC - M 32M 25	19000001213
M 40x2.0	M 32x2.0	9.0	13	42	WNSC - M 40M 32	19000001214
M 50x2.0	M 40x2.0	9.0	14	57	WNSC - M 50M 40	19000001215
M 63x2.0	M 50x2.0	11.0	14	65	WNSC - M 63M 50	19000001216



电缆接头Cable glands

尼龙减径环 Polyamide reducer

材料：PA 66	Material: Polyamide
颜色：黑色	Color: Black
温度范围：- 40 ...+100	Temperature range: - 40 ...+100



单位：mm Unit: mm						
外螺纹 (AG) Outside thread (AG)	内螺纹 (LG) Inside thread (LG)	外螺纹长度 (GL) Outside thread length (GL)	总长 (H) Total length (H)	扳手尺寸 (SW) Wrench size (SW)	型号 Designation	订货号 Order NO.
PG 制螺纹 PG Thread						
PG 11	PG 9	8	15	24	WN SCP - PG 11PG 9	09000001310
PG 13.5	PG 11	9	21.5	22	WN SCP - PG 13.5PG 11	09000001311
PG 16	PG 11	10	16	27	WN SCP - PG 16PG 11	09000001312
PG 16	PG 13.5	10	17	27	WN SCP - PG 16PG 13.5	09000001313
PG 21	PG 16	11	17	39	WN SCP - PG 21PG 16	09000001314
PG 29	PG 21	11.5	17	39	WN SCP - PG 29PG 21	09000001315
M 公制螺纹 Metric Thread						
M 20x1.5	M 16x1.5	9.5	15	24	WN SCP - M 20M 16	19000001310
M 25x1.5	M 20x1.5	10	17	27	WN SCP - M 25M 20	19000001311
M 32x1.5	M 20x1.5	11.5	17	39	WN SCP - M 32M 20	19000001312
M 32x1.5	M 25x1.5	11	17	39	WN SCP - M 32M 25	19000001313
M 40x1.5	M 32x1.5	11	17	45	WN SCP - M 40M 32	19000001314



电缆接头Cable glands


金属螺母Metal lock nut

材料：黄铜镀镍

Material: Nickel-plated brass

温度范围：-40 ...+100

Temperature range: -40 ...+100



单位：mm
Unit: mm

螺纹尺寸 Thread size	扳手尺寸 (SW) Wrench size (SW)	厚度 (H) Thickness (H)	型号 Designation	订货号 Order NO.
PG 制螺纹 PG Thread				
PG 7	15	2.8	WNA - PG 7 S	09000001410
PG 9	18	2.8	WNA - PG 9 S	09000001411
PG 11	21	3.0	WNA - PG 11 S	09000001412
PG 13.5	22	3.0	WNA - PG 13.5 S	09000001413
PG 16	24	3.0	WNA - PG 16 S	09000001414
PG 21	30	3.5	WNA - PG 21 S	09000001415
PG 29	40	4.0	WNA - PG 29 S	09000001416
PG 36	50	4.5	WNA - PG 36 S	09000001417
PG 42	57	5.0	WNA - PG 42 S	09000001418
PG 48	65	5.5	WNA - PG 48 S	09000001419
M 公制螺纹 Metric Thread				
M 12x1.5	15	2.8	WNA - M 12 S	19000001410
M 16x1.5	18	2.8	WNA - M 16 S	19000001411
M 20x1.5	22	3.0	WNA - M 20 S	19000001412
M 25x1.5	27	3.0	WNA - M 25 S	19000001413
M 32x2.0	35	3.5	WNA - M 32 S	19000001414
M 40x2.0	50	4.5	WNA - M 40 S	19000001415
M 50x2.0	57	5.0	WNA - M 50 S	19000001416
M 63x2.0	70	5.5	WNA - M 63 S	19000001417



电缆接头Cable glands

尼龙螺母 Polyamide lock nut

材料：66


Material: Polyamide

颜色：灰色、黑色

Color: Grey, Black

温度范围：-40 ...+100

Temperature range: -40 ...+100



单位：mm
Unit: mm

螺纹尺寸 Thread size	扳手尺寸 (SW) Wrench size (SW)	厚度 (H) Thickness (H)	型号 (灰色) Designation (Grey)	订货号 Order NO.	型号 (黑色) Designation (Black)	订货号 Order NO.
PG制螺纹 PG Thread						
PG 7	19	5.0	WNAP - PG 7G S	09000001510	WNAP - PG 7B S	09000001520
PG 9	22	5.0	WNAP - PG 9G S	09000001511	WNAP - PG 9B S	09000001521
PG 11	24	5.0	WNAP - PG 11G S	09000001512	WNAP - PG 11B S	09000001522
PG 13.5	27	6.0	WNAP - PG 13.5G S	09000001513	WNAP - PG 13.5B S	09000001523
PG 16	30	6.0	WNAP - PG 16G S	09000001514	WNAP - PG 16B S	09000001524
PG 21	36	7.0	WNAP - PG 21G S	09000001515	WNAP - PG 21B S	09000001525
PG 29	45	7.0	WNAP - PG 29G S	09000001516	WNAP - PG 29B S	09000001526
PG 36	59	8.0	WNAP - PG 36G S	09000001517	WNAP - PG 36B S	09000001527
PG 42	65	8.0	WNAP - PG 42G S	09000001518	WNAP - PG 42B S	09000001528
PG 48	70	8.0	WNAP - PG 48G S	09000001519	WNAP - PG 48B S	09000001529
M公制螺纹 Metric Thread						
M 12x1.5	19	5.0	WNAP - M 12G S	19000001510	WNAP - M 12B S	19000001521
M 16x1.5	22	5.0	WNAP - M 16G S	19000001511	WNAP - M 16B S	19000001522
M 18x1.5	24	5.0	WNAP - M 18G S	19000001512	WNAP - M 18B S	19000001523
M 20x1.5	27	6.0	WNAP - M 20G S	19000001513	WNAP - M 20B S	19000001524
M 22x1.5	30	6.0	WNAP - M 22G S	19000001514	WNAP - M 22B S	19000001525
M 24x1.5	30	6.0	WNAP - M 24G S	19000001515	WNAP - M 24B S	19000001526
M 25x1.5	32	7.0	WNAP - M 25G S	19000001516	WNAP - M 25B S	19000001527
M 32x1.5	40	7.0	WNAP - M 32G S	19000001517	WNAP - M 32B S	19000001528
M 40x1.5	49	8.0	WNAP - M 40G S	19000001518	WNAP - M 40B S	19000001529
M 50x1.5	65	8.0	WNAP - M 50G S	19000001519	WNAP - M 50B S	19000001530
M 63x1.5	74	8.0	WNAP - M 63G S	19000001520	WNAP - M 63B S	19000001531