


技术参数 (DIN EN 61984)

插针数	4+PE
额定电流	35A
额定电压	500V
脉冲电压	6KV
污染等级	3
绝缘电阻	$\geq 10^{10} \Omega$
材料	PC+20%GF
阻燃等级	UL94-V0
温度范围	-40°C~+125°C
接线方式	螺丝连接
插拔次数	≥ 500

REVISIONS

REV	ECN	DESCRIPTION	DATE	DRFT
-----	-----	-------------	------	------

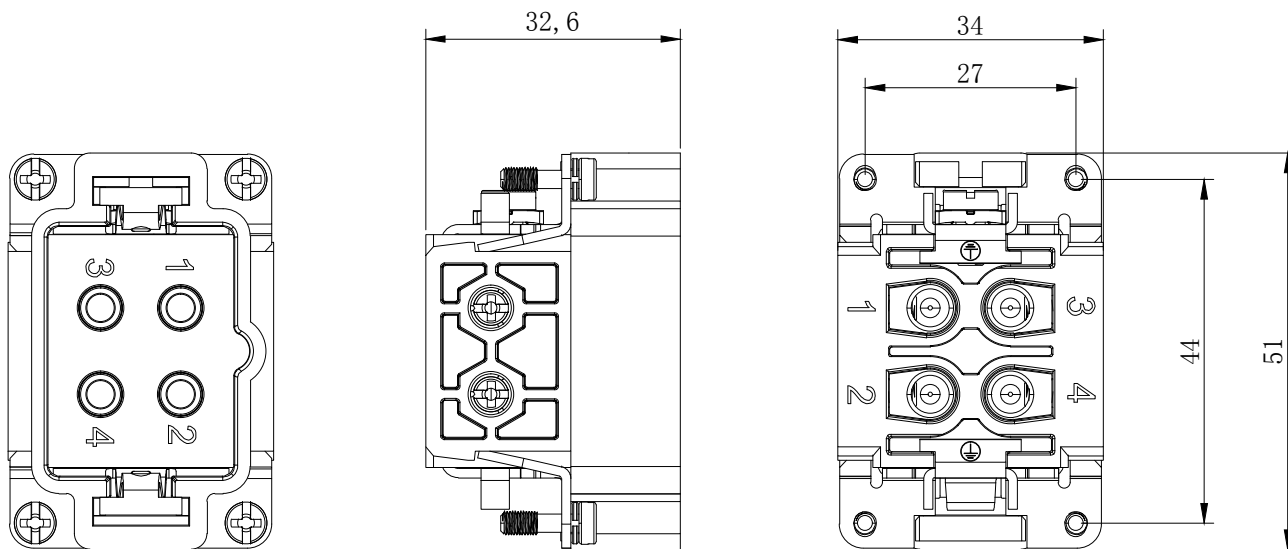

未注尺寸公差(mm)

0 ~ ≤ 20	20 ~ ≤ 50	50 ~ ≤ 80	80 ~ ≤ 120	120 ~ ≤ 150	150 ~ ≤ 200	>200
± 0.15	± 0.25	± 0.35	± 0.50	± 0.70	± 1.00	± 1.50

浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO., LTD		图号 Drawing No:		/	
产品代号 Part Code: HSBS-004-M		产品料号 PART NO:		/	
Date:	2022.05.13	Scale	REV	Weight	Qty
	All Dimensions in mm Original Size DIN A 4	1:1.5	HK-1	/	/
Drawn:	Tang	SHEET	1/1		