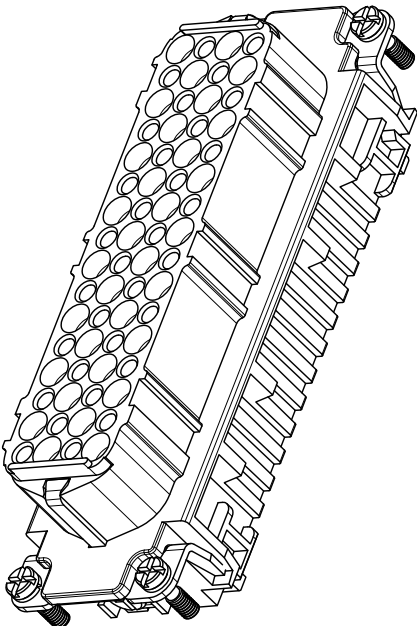
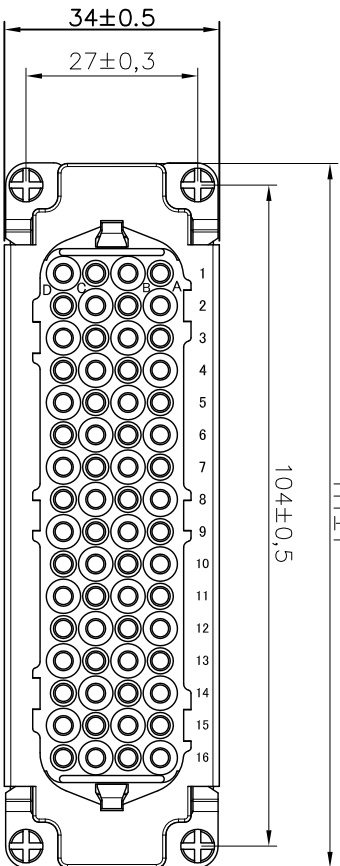
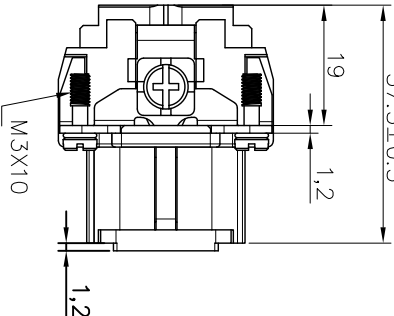





8		7	6	5	4	3	2	1			
H		技术参数 (DIN EN 61984)					REVISIONS				
插针数		64+PE					REV	ECN	DESCRIPTION	DATE	DRAFT
额定电流		10A									
额定电压		250V									
脉冲电压		4kV									
污染等级		3									
绝缘电阻		≥10 ¹⁰ Ω									
材料		聚碳酸酯									
阻燃等级		UL94-V0									
温度范围		-40℃~+125℃									
接线方式		冷压连接									
插拔次数		≥500									
G											
F											
E											
D											
C											
B											
A											

8		7	6	5	4	3	2	1
A							B	

8		7	6	5	4	3	2	1
H							G	
F							E	
D							C	
B							A	

8		7	6	5	4	3	2	1							
A							B								
Date:		2021.04.24		Scale		REV		Weight		Qty		Drawn		SHEET	
All Dimensions in mm		Original Size DIN A 4		HK-1		/		/		/		/		1/1	

8		7	6	5	4	3	2	1
A		产品代号 Part Code: HD-064-FC					图号 Drawing No: /	
B		浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO., LTD					产品料号 PART NO: /	

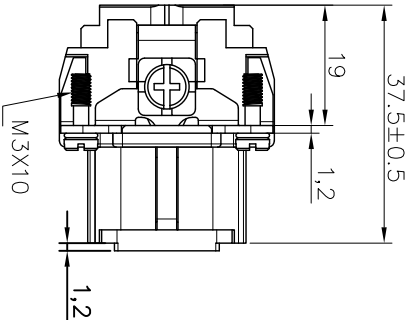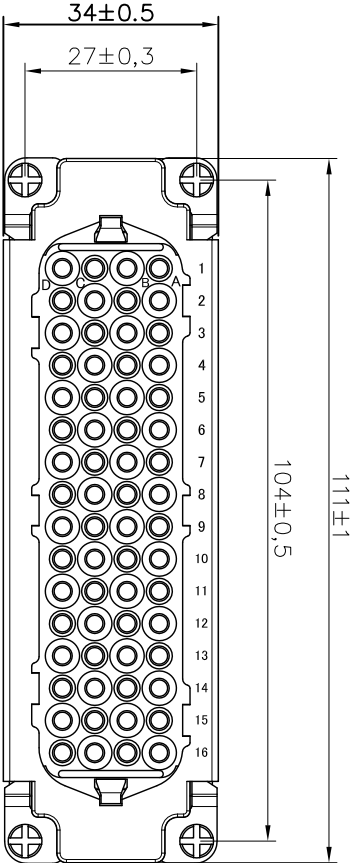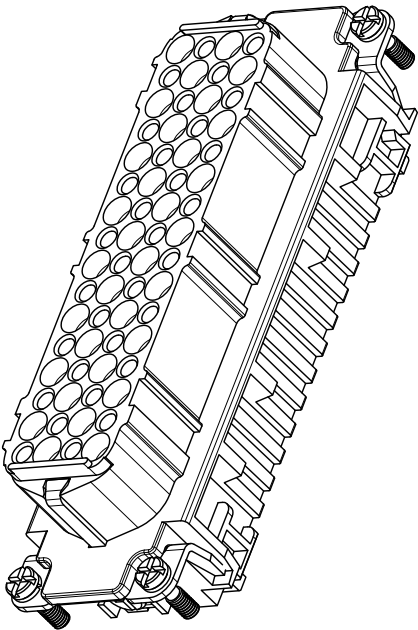

ZJK		浙江昊科电气有限公司		图号	
ZHEJIANG HAOKE ELECTRICAL CO., LTD				Drawing No:	
Part Code: HD-064-FC		产品料号		PART NO:	
Date: 2021.04.24	Scale	REV	Weight	Qty	Drawing
All Dimensions in mm	Original Size DIN A 4	HK-1	/	/	Tang
Date: 2021.04.24		Scale	REV	Weight	Qty
All Dimensions in mm		Original Size DIN A 4	HK-1	/	Tang