
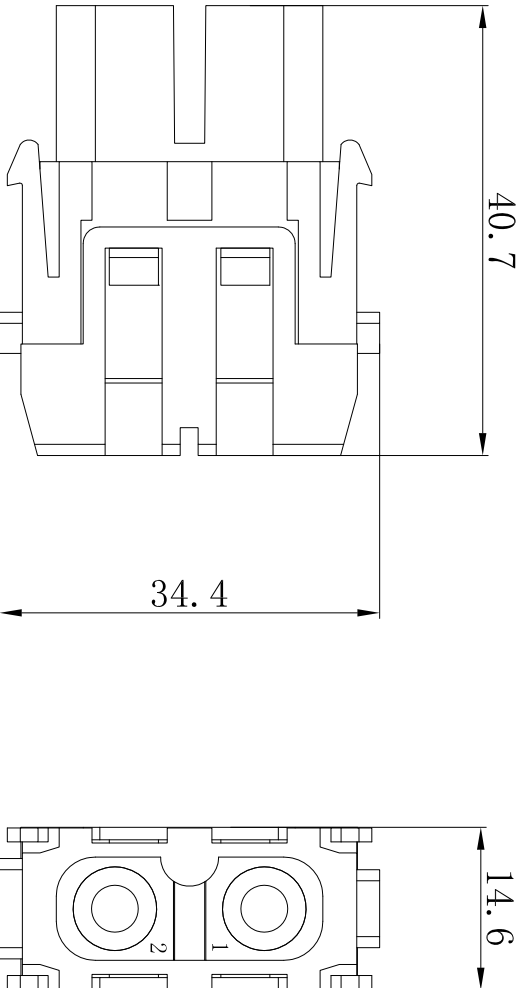


技术参数 (DIN EN 61984)	
插针数	2
额定电流	40A
额定电压	1000V
脉冲电压	8KV
污染等级	3
绝缘电阻	≥10 ¹⁰ Ω
材料	聚碳酸酯
阻燃等级	UL94-V0
温度范围	-40℃~+125℃
接线方式	轴向螺栓连接
插拔次数	≥500

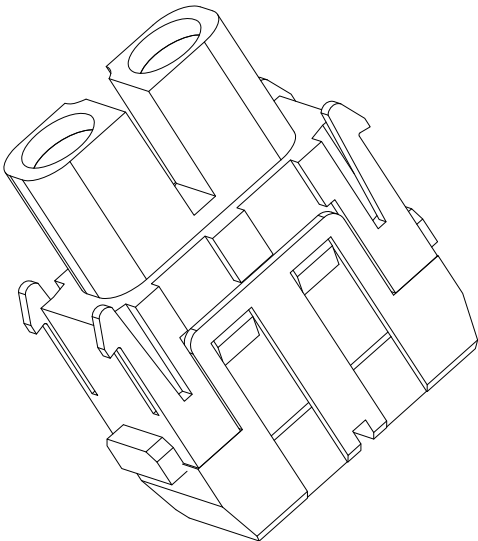

未注尺寸公差(mm)						
0 ~ ≤20	20 ~ ≤50	50 ~ ≤80	80 ~ ≤120	120 ~ ≤150	150 ~ ≤200	>200
±0.15	±0.25	±0.35	±0.50	±0.70	±1.00	±1.50

产品代号 Part Code:		浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO., LTD		图号 Drawing No:	
HMK-002.2-F(6-10mm ²)				/	
Date:	2021.04.24	Scale	REV	Weight	Qty
	All Dimensions in mm Original Size DIN A 4	2:1	HK-1	/	/

产品料号 PART NO:		SHEET	
		1/1	