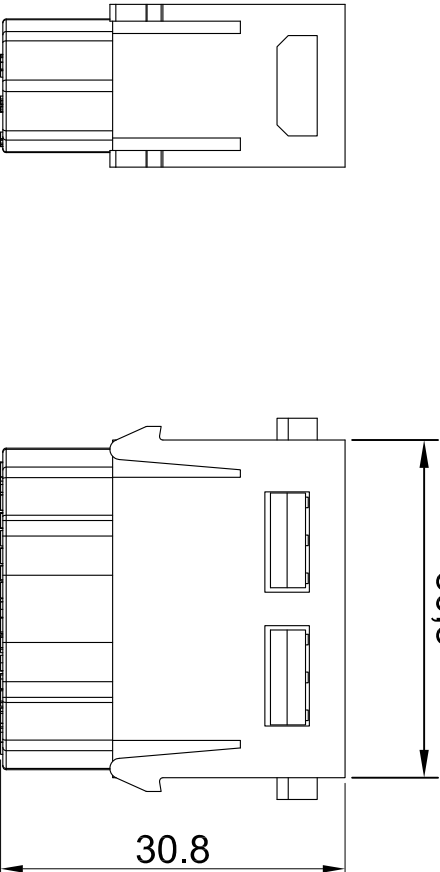


8		7		6		5		4		3		2		1	
技术参数 (DIN EN 61984)										REVISIONS					
										REV	ECN	DESCRIPTION	DATE	DRFT	
H	插针数				25										
H	额定电流				4A										
H	额定电压				50V										
H	脉冲电压				0.8KV										
H	污染等级				3										
G	绝缘电阻				≥10 ¹⁰ Ω										
G	材料				聚碳酸酯										
G	阻燃等级				UL94-V0										
G	温度范围				-40℃~+125℃										
G	接线方式				冷压连接										
F	插拔次数				≥500										

未注尺寸公差(mm)									
0 ~ ≤20	20 ~ ≤50	50 ~ ≤80	80 ~ ≤120	120 ~ ≤150	150 ~ ≤200	>200			
±0.15	±0.25	±0.35	±0.50	±0.70	±1.00	±1.50			

										浙江昊科电气有限公司 ZHEJIANG HAOKO ELECTRICAL CO., LTD					图号 Drawing No:		/	
产品代号 Part Code: HMDS-025-FC										产品料号 PART NO:					/			
Date:		2021.04.24		Scale		REV		Weight		Qty		Drawn:		SHEET				
All Dimensions in mm Original Size DIN A 4		2:1		HK-1		/		/		/		/		1/1				