

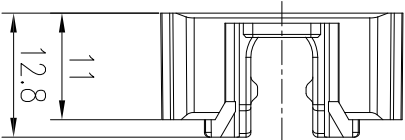


8		7		6		5		4		3		2		1		H
8		7		6		5		4		3		2		1		G
8		7		6		5		4		3		2		1		F
8		7		6		5		4		3		2		1		E
8		7		6		5		4		3		2		1		D
8		7		6		5		4		3		2		1		C
8		7		6		5		4		3		2		1		B
8		7		6		5		4		3		2		1		A
8		7		6		5		4		3		2		1		H
8		7		6		5		4		3		2		1		G
8		7		6		5		4		3		2		1		F
8		7		6		5		4		3		2		1		E
8		7		6		5		4		3		2		1		D
8		7		6		5		4		3		2		1		C
8		7		6		5		4		3		2		1		B
8		7		6		5		4		3		2		1		A

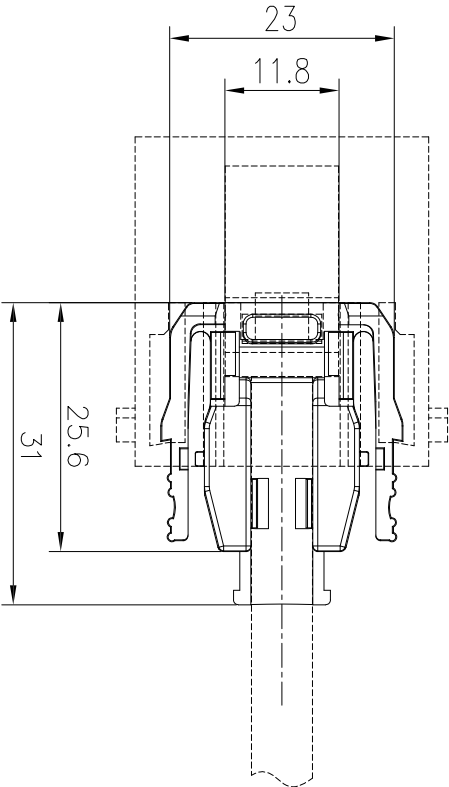

- 技术参数:
- 插芯:
- 插针数: 8
 - 额定电流: 1A
 - 额定电压: 50V
 - 额定脉冲电压: 0.8KV
 - 污染等级: 3
 - 依据UL的额定电压: <30V
 - 传输特性: 超6类可达500MHz
 - 依据IEC/IEC 24 702
 - ISO/IEC 11 801
 - 传输速率: 10/100/1000Mb/s/10Gb/s
 - 绝缘电阻: $\geq 10^{10}\Omega$
 - 材料: 聚碳酸酯
 - 温度范围: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - 依据UL94阻燃等级: V0
 - 可拔插次数: ≥ 500

ZJKK		浙江昊科电气有限公司		图号	
ZHEJIANG HAOKE ELECTRICAL CO., LTD		DRAWING No:		/	

产品代号 Part Code:		HM-RJ45-APT		产品料号 PART NO:	
--------------------	--	-------------	--	------------------	--

Date:	2020.12.17	Scale	REV	Weight	Qty	Drawn:	SHEET
All Dimensions in mm Original Size DIN A 4	1:1	HK-1	/	/	/	Tang	1/1