


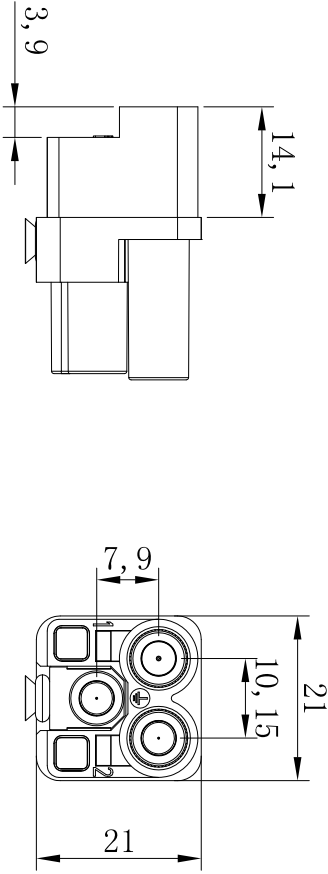


REVISIONS				
REV	ECN	DESCRIPTION	DATE	DRFT



- 技术参数:
- 插芯:
- 插针数: 2+PE
 - 额定电流: 40A
 - 额定电压: 830V
 - 额定脉冲电压: 6kV
 - 污染等级: 3
 - 依据UL/CSA的额定电压: 600V
 - 绝缘阻抗: $\geq 10^{10}\Omega$
 - 材料: 聚碳酸酯
 - 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - 依据UL94的阻燃等级: V0
 - 可插拔次数: ≥ 500
- 插针:
- 接线方式: 轴向螺栓连接
 - 材料: 铜合金
 - 表面处理: 镀银
 - 接触电阻: $\leq 1\text{m}\Omega$
 - 线径范围: 2.5–6mm² (14–10 AWG)
 - 拧紧力矩: 1.8N.m
 - 剥线长度: 8–9mm
- 附件:
- 内六角扳手: SW-2*40
 - 编码元件: CODE-Q2

产品代号 Part Code:				图号 Drawing No:	
HQP-002.1-F (2.5–6mm ²)				/	
Date:	2022.07.14	Scale	REV	Weight	Qty
All Dimensions in mm Original Size DIN A 4	1:1.5	HK-1	/	/	Tang
产品料号 PART NO:				/	
浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO., LTD				/	
产品代号 Part Code:				/	
Date:	2022.07.14	Scale	REV	Weight	Qty
All Dimensions in mm Original Size DIN A 4	1:1.5	HK-1	/	/	Tang
产品料号 PART NO:				/	
浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO., LTD				/	
产品代号 Part Code:				/	

8	7	6	5	4	3	2	1
H	G	F	E	D	C	B	A
8	7	6	5	4	3	2	1
A	B	C	D	E	F	G	H