


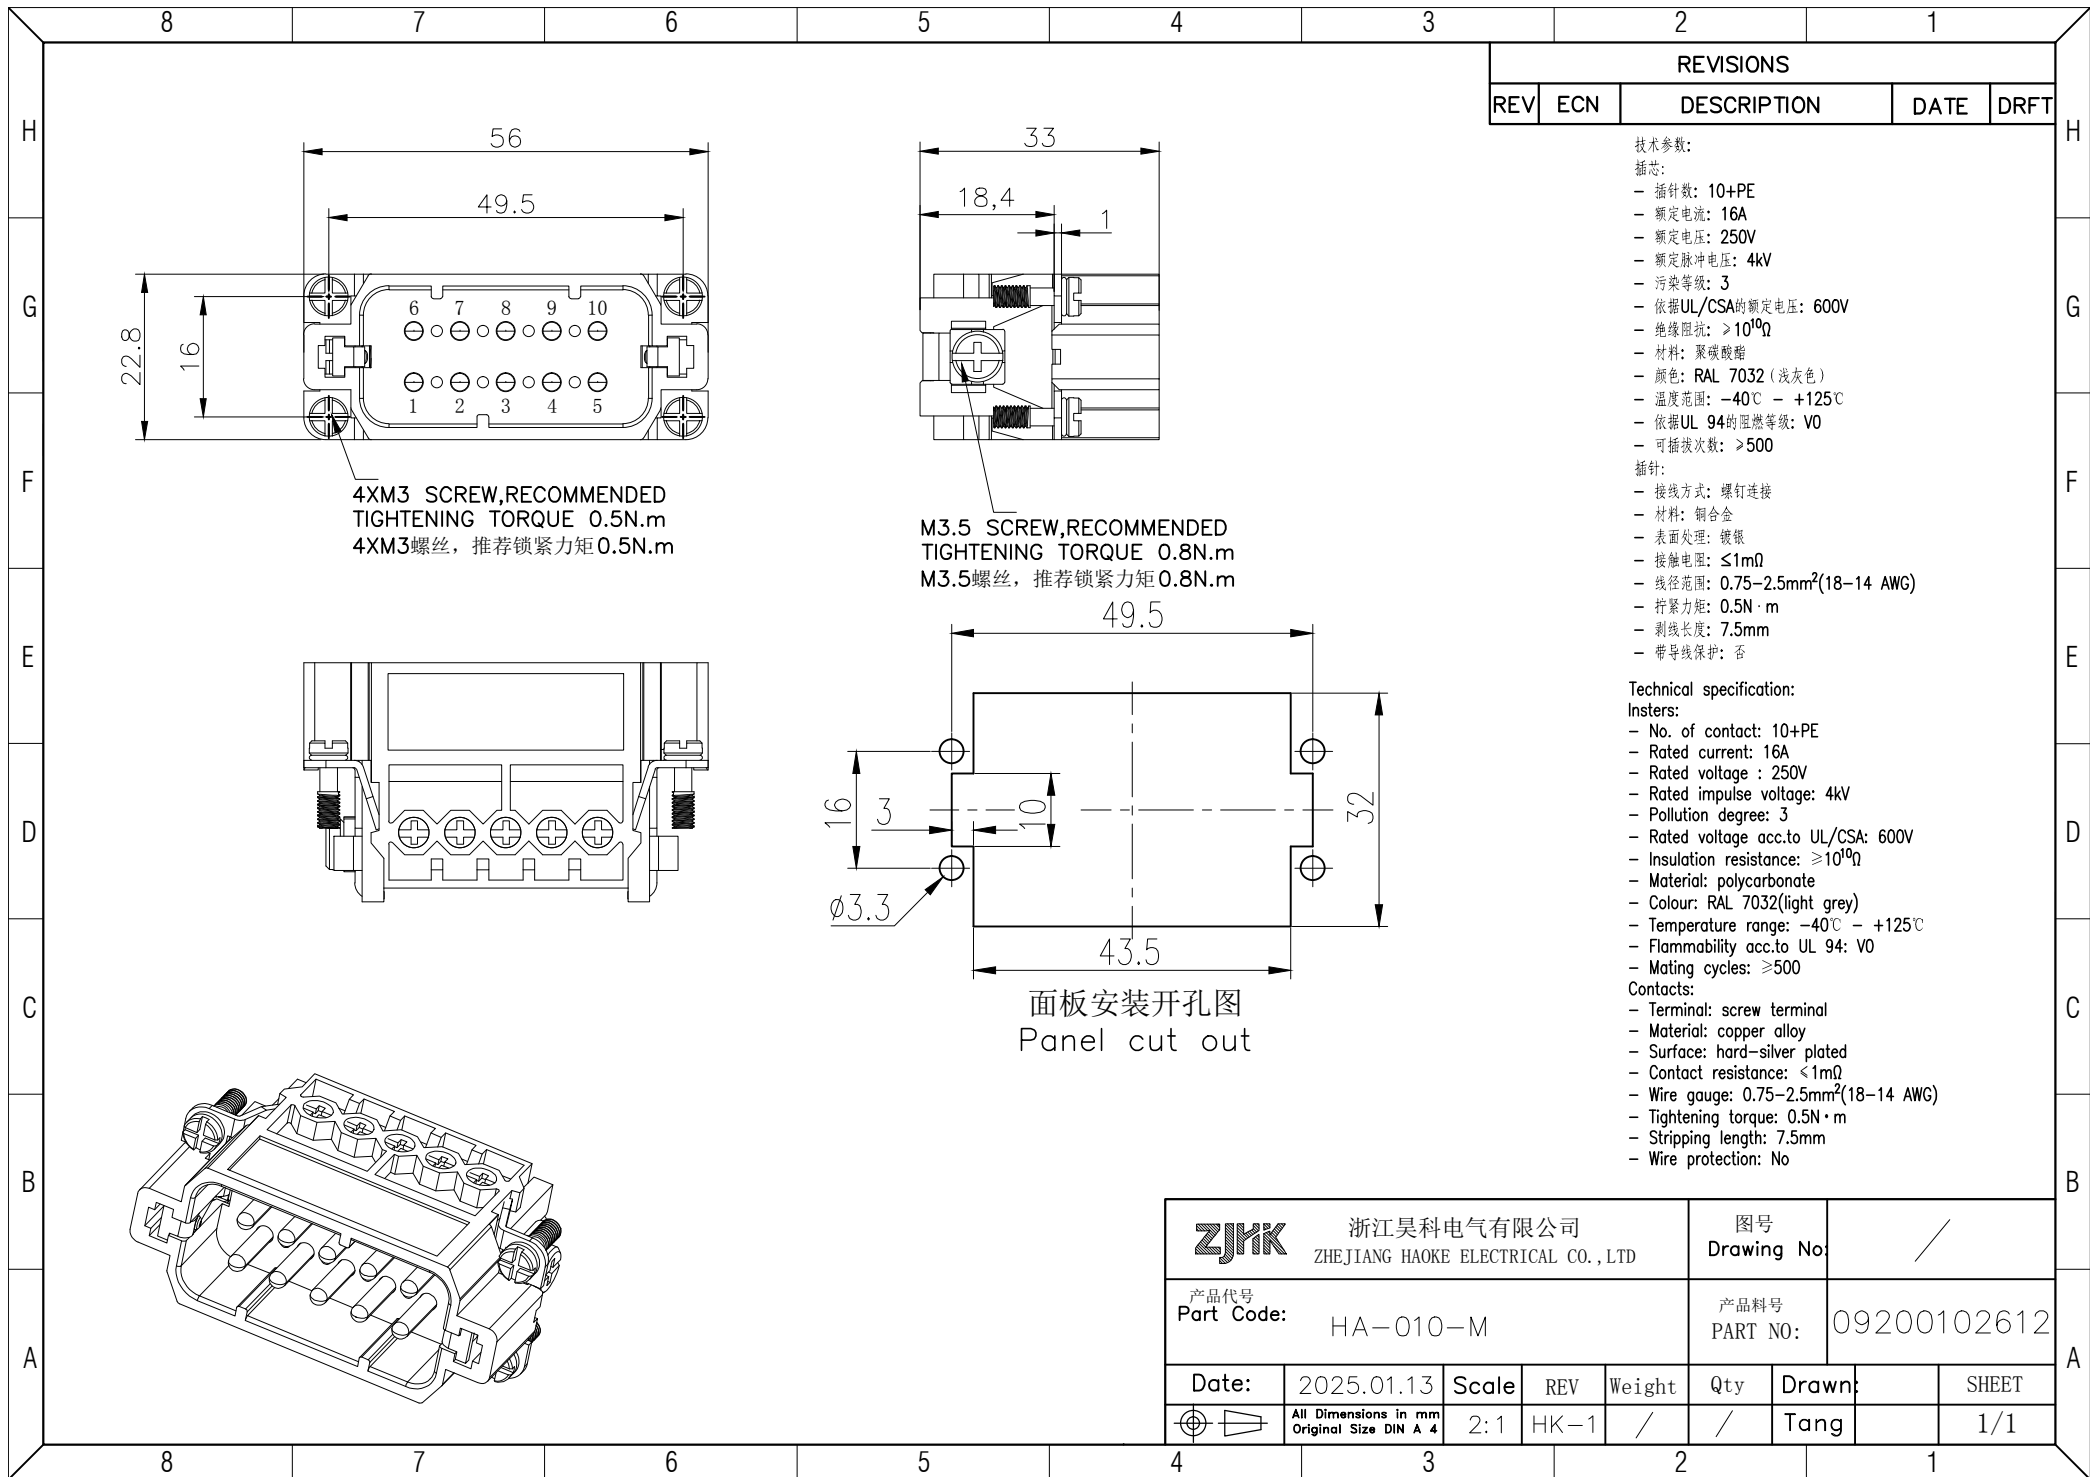

REVISIONS

REV	ECN	DESCRIPTION	DATE	DRFT
-----	-----	-------------	------	------

技术参数:

插芯:

- 插针数: 10+PE
- 额定电流: 16A
- 额定电压: 250V
- 额定脉冲电压: 4kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500

插针:

- 接线方式: 螺钉连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 1\text{m}\Omega$
- 线径范围: $0.75-2.5\text{mm}^2(18-14\text{ AWG})$
- 拧紧力矩: $0.5\text{N}\cdot\text{m}$
- 剥线长度: 7.5mm
- 带导线保护: 否

Technical specification:

Insters:

- No. of contact: 10+PE
- Rated current: 16A
- Rated voltage : 250V
- Rated impulse voltage: 4kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500

Contacts:

- Terminal: screw terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $< 1\text{m}\Omega$
- Wire gauge: $0.75-2.5\text{mm}^2(18-14\text{ AWG})$
- Tightening torque: $0.5\text{N}\cdot\text{m}$
- Stripping length: 7.5mm
- Wire protection: No

ZJHK

浙江昊科电气有限公司
ZHEJIANG HAOKE ELECTRICAL CO.,LTD

图号
Drawing No:

/

产品代号

Part Code: HA-010-M

产品料号

PART NO: 09200102612

Date:

2025.01.13

Scale

REV

Weight

Qty

Drawn:

SHEET



All Dimensions in mm
Original Size DIN A 4

2:1

HK-1

/

/

Tang

1/1