

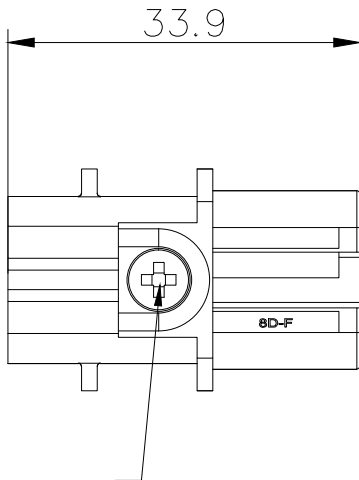


8		7		6		5		4		3		2		1			
														REVISIONS			
REV		ECN		DESCRIPTION						DATE		DRFT					

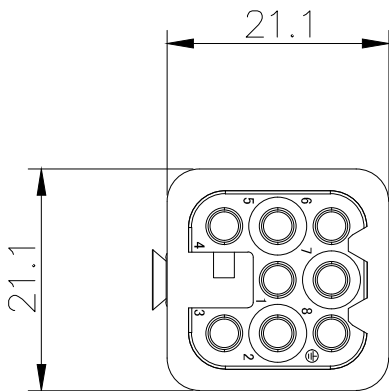

M3 SCREW,RECOMMENDED
TIGHTENING TORQUE 0.5N.m
M3螺丝，推荐锁紧力矩0.5N.m

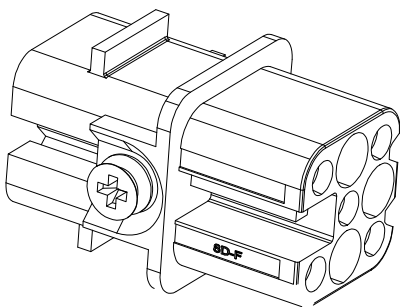

技术参数:

插芯:

- 插针数: 8
- 额定电流: 10A
- 额定电压: -120V/~50V
- 额定脉冲电压: 0.8kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 50V
- 额定电压(直流电压): 120V
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032(浅灰色)
- 温度范围: -40℃ - +125℃
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500

插针:

- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理:
 - 镀银
 - 银金
- 接触电阻: $\leq 3m\Omega$
- 线径范围: 0.14-2.5mm²(26-14 AWG)
- 工具:
 - 冷压钳: TL02G
 - 退针器: TL00

Technical specification:

Insters:

- No. of contact: 8
- Rated current: 10A
- Rated voltage: -120V/~50V
- Rated impulse voltage: 0.8kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 50V
- Rated voltage(direct voltage): 120V
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: -40℃ - +125℃
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500

Contacts:

- Terminal: crimp terminal
- Material: copper alloy
- Surface:
 - Hard-silver plated
 - Hard-gold plated
- Contact resistance: $\leq 3m\Omega$
- Wire gauge: 0.14-2.5mm²(26-14 AWG)
- Tools:
 - Crimp contact tool: TL02G
 - Contact removal tool: TL00

ZJHK 浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO.,LTD					图号 Drawing No:		/	
产品代号 Part Code: HD-008-FC					产品料号 PART NO:		09360083101	
Date:	2025.01.14	Scale	REV	Weight	Qty	Drawn:	SHEET	
	All Dimensions in mm Original Size DIN A 4		2:1	HK-1	/	Tang	1/1	