




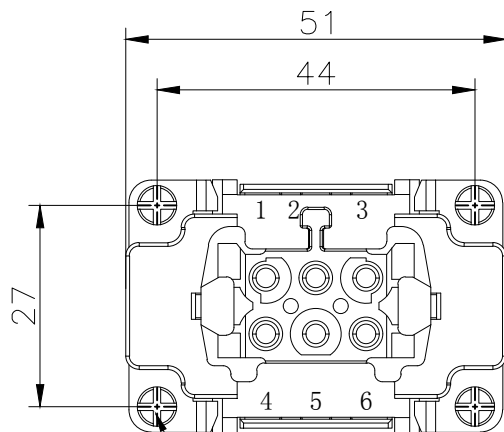


4XM3 SCREW,RECOMMENDED
TIGHTENING TORQUE 0.5N.m
4XM3螺丝,推荐锁紧力矩0.5N.m

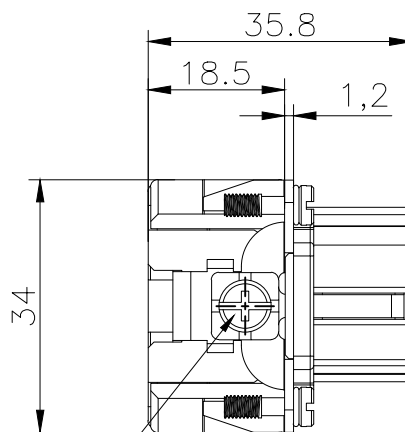

M4 SCREW,RECOMMENDED
TIGHTENING TORQUE 1.2N.m
M4螺丝,推荐锁紧力矩1.2N.m

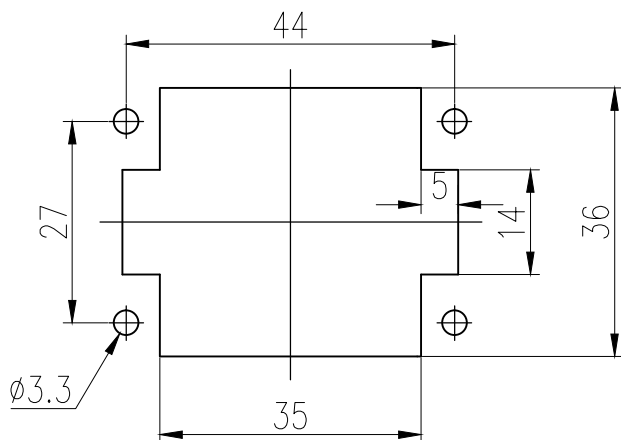

面板安装开孔图
Panel cut out

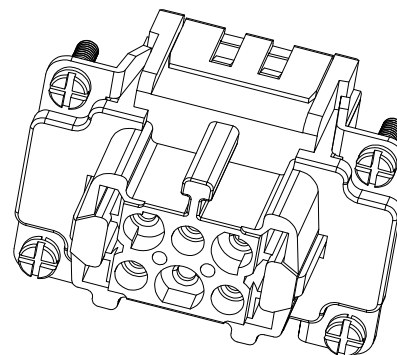

技术参数:

插芯:

- 插针数: 6+PE
- 额定电流: 16A
- 额定电压: 500V
- 额定脉冲电压: 6kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500

插针:

- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理:
 - 镀银
 - 银金
- 接触电阻: $\leq 1\text{m}\Omega$
- 线径范围: $0.14-4.0\text{mm}^2(26-12\text{ AWG})$
- 剥线长度: 7.5mm
- 工具:
 - 冷压钳:
TL02G($0.14-4\text{mm}^2$)
 - 退针器: TL01

REVISIONS

REV	ECN	DESCRIPTION	DATE	DRFT
-----	-----	-------------	------	------

Technical specification:

Inserts:

- No. of contact: 6+PE
- Rated current: 16A
- Rated voltage: 500V
- Rated impulse voltage: 6kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance: $> 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: -40 - $+125$
- Flammability acc.to UL 94: V0
- Mating cycles: > 500

Contacts:

- Terminal: crimp terminal
- Material: copper alloy
- Surface:
 - Hard-silver plated
 - Hard-gold plated
- Contact resistance: $\leq 1\text{m}\Omega$
- Wire gauge: $0.14-4.0\text{mm}^2(26-12\text{ AWG})$
- Stripping length: 7.5mm
- Tools:
 - Crimp contact tool:
TL02G($0.14-4\text{mm}^2$)
 - Contact removal tool: TL01

ZJKK

浙江昊科电气有限公司
ZHEJIANG HAOKE ELECTRICAL CO.,LTD

图号
Drawing No:

/

产品代号

Part Code:

HE-006-FC

产品料号
PART NO:

09330062702

Date:

2025.01.15

Scale

REV

Weight

Qty

Drawn:

SHEET



All Dimensions in mm
Original Size DIN A 4

2:1

HK-1

/

/

Tang

1/1