
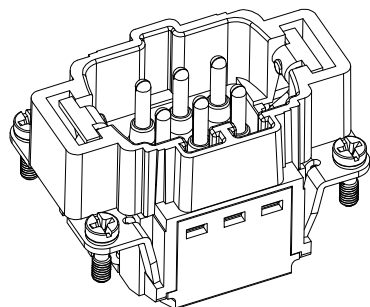
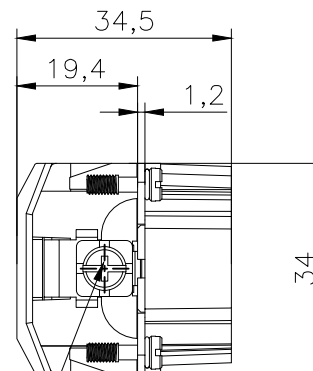
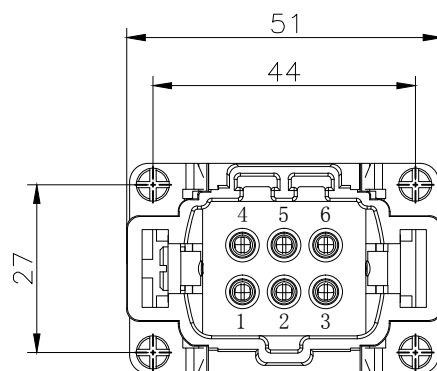




ZJK

浙江昊科电气有限公司
ZHEJIANG HAOKE ELECTRICAL CO., LTD

图号	Drawing No.
----	-------------

产品代号

Part Code: HE-006-MZ

产品料号

PART NO:	09330062801
----------	-------------

Date:

2025.01.15

Scale

REV

Weight.

Qty	Drawn:
-----	--------

SHEET



	All Dimensions in mm Original Size DIN A 4
--	---

1:1

HK—

[illegible]

	Tang
--	------

1/1

REV	ECN	DESCRIPTION	DATE	DRFT
-----	-----	-------------	------	------

- 插针数: 6+PE
- 额定电流: 16A
- 额定电压: 500V
- 额定脉冲电压: 6kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500

- 接线方式：直插式弹片连接
- 材料：铜合金
- 表面处理：镀银
- 接触电阻： $\leq 5\text{m}\Omega$
- 线径范围：0.14~2.5mm²(26~14 AWG)
- 剥线长度：8~10mm

- No. of contact: 6+PE
- Rated current: 16A
- Rated voltage: 500V
- Rated impulse voltage: 6kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance: $>10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: >500

- Terminal: Quick lock terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 5\text{m}\Omega$
- Wire gauge: 0.14-2.5mm²(26-14 AWG)
- Stripping length: 8-10mm