
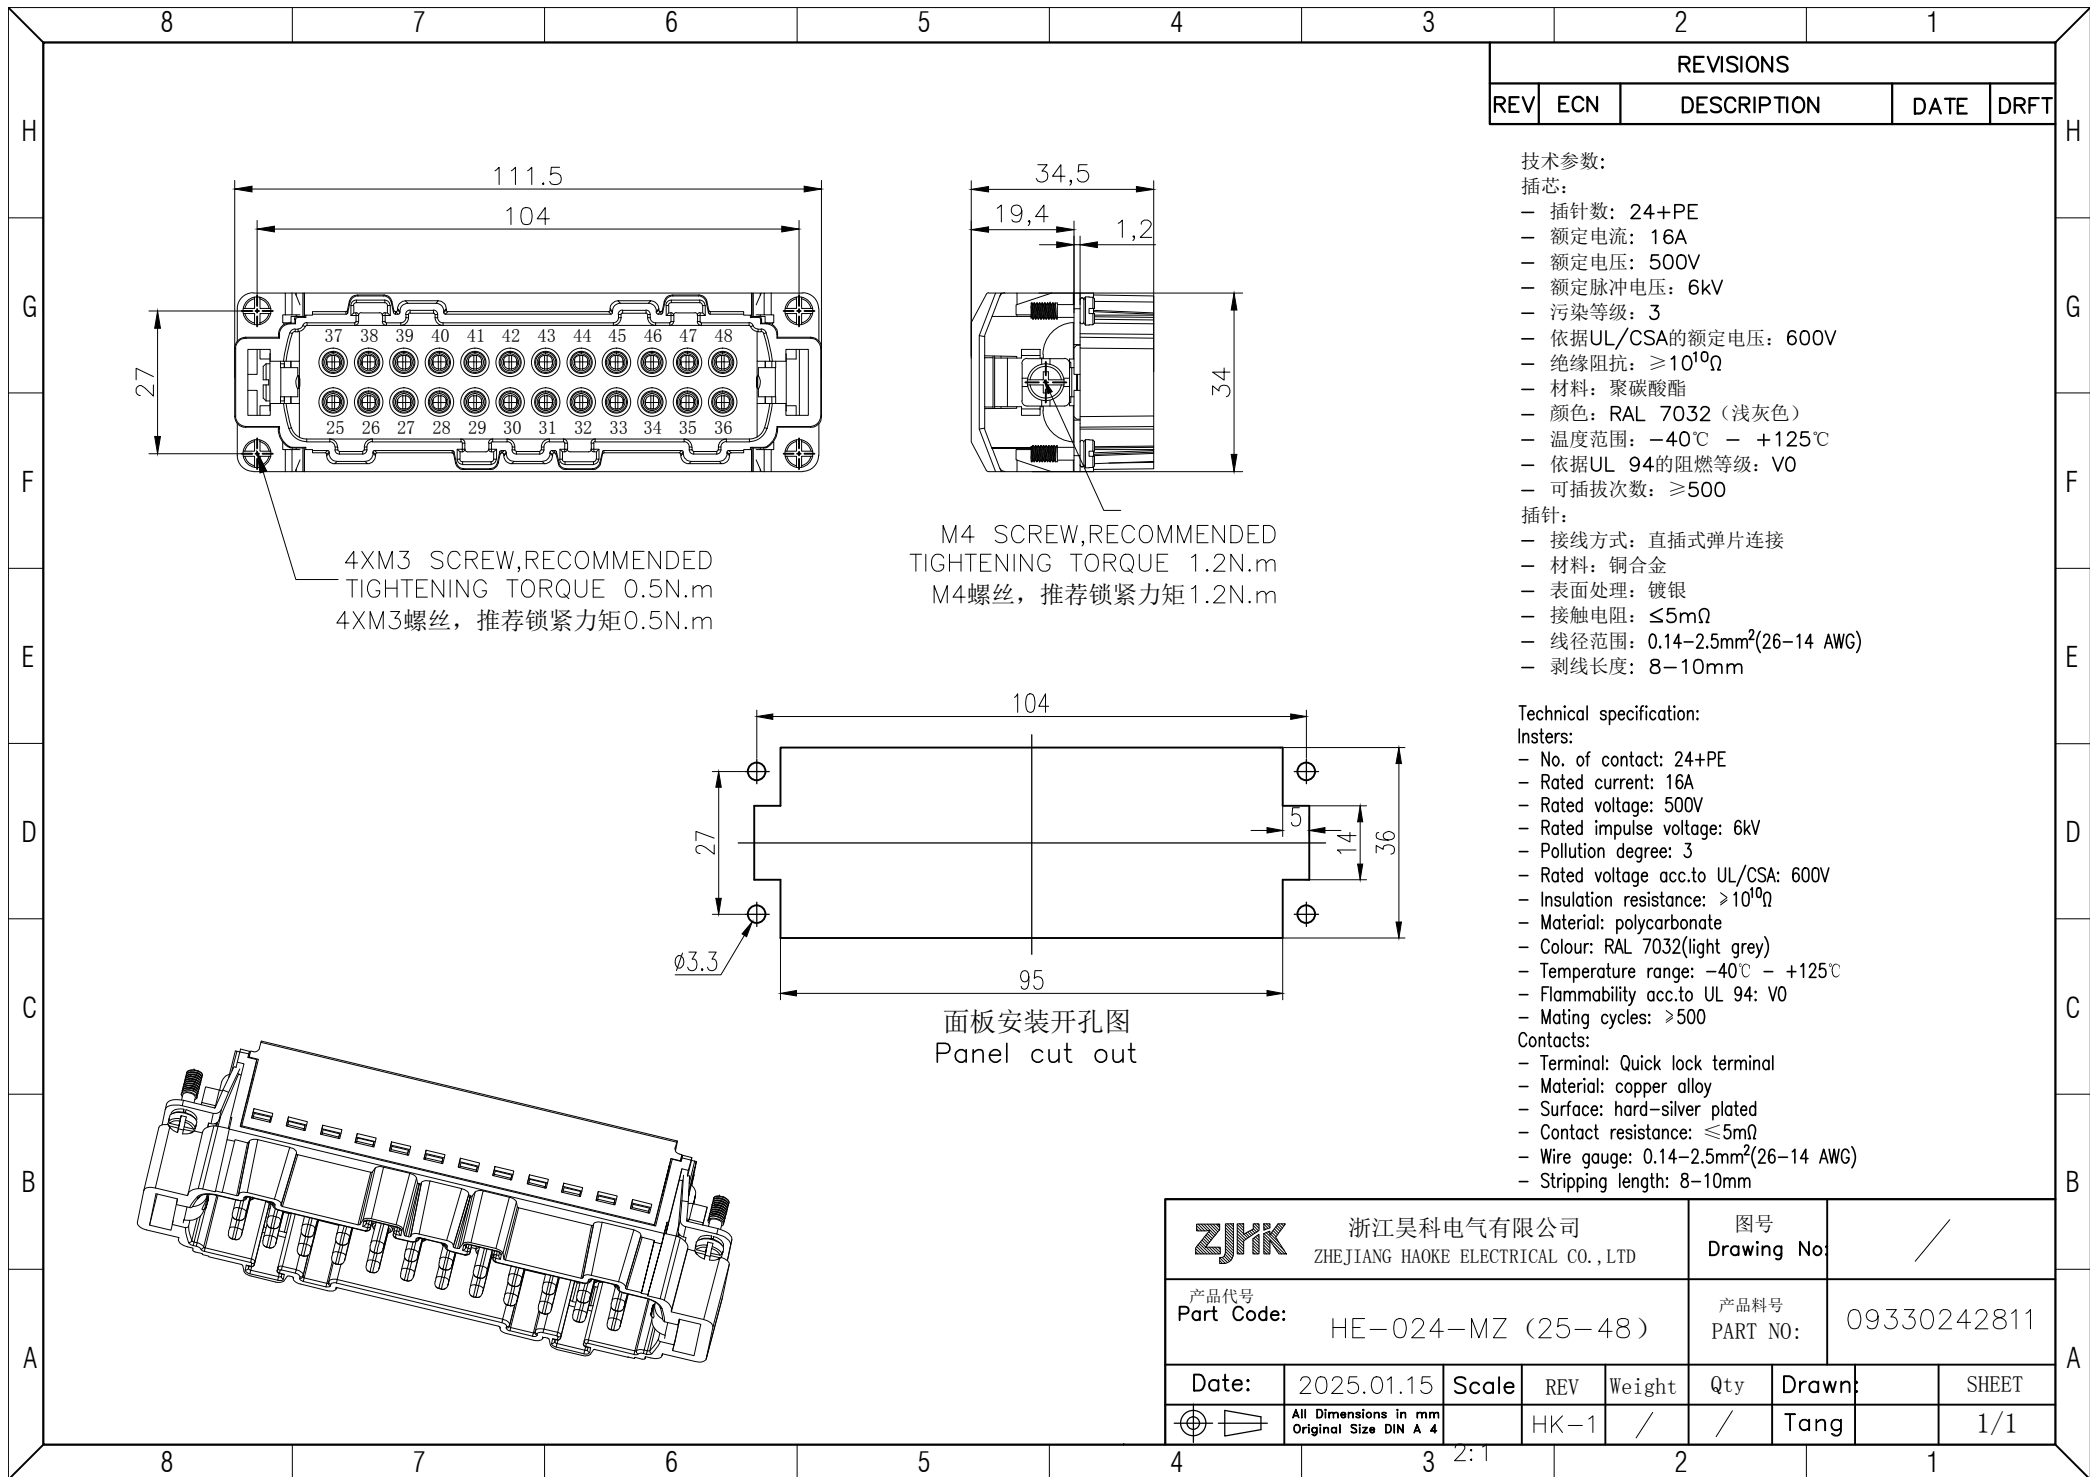




REVISIONS				
REV	ECN	DESCRIPTION	DATE	DRFT

- 技术参数:
- 插芯:
- 插针数: 24+PE
 - 额定电流: 16A
 - 额定电压: 500V
 - 额定脉冲电压: 6kV
 - 污染等级: 3
 - 依据UL/CSA的额定电压: 600V
 - 绝缘阻抗: $\geq 10^{10}\Omega$
 - 材料: 聚碳酸酯
 - 颜色: RAL 7032 (浅灰色)
 - 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - 依据UL 94的阻燃等级: V0
 - 可插拔次数: ≥ 500
- 插针:
- 接线方式: 直插式弹片连接
 - 材料: 铜合金
 - 表面处理: 镀银
 - 接触电阻: $\leq 5\text{m}\Omega$
 - 线径范围: 0.14-2.5mm²(26-14 AWG)
 - 剥线长度: 8-10mm

- Technical specification:
- Insters:**
- No. of contact: 24+PE
 - Rated current: 16A
 - Rated voltage: 500V
 - Rated impulse voltage: 6kV
 - Pollution degree: 3
 - Rated voltage acc.to UL/CSA: 600V
 - Insulation resistance: $> 10^{10}\Omega$
 - Material: polycarbonate
 - Colour: RAL 7032(light grey)
 - Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - Flammability acc.to UL 94: V0
 - Mating cycles: > 500
- Contacts:**
- Terminal: Quick lock terminal
 - Material: copper alloy
 - Surface: hard-silver plated
 - Contact resistance: $\leq 5\text{m}\Omega$
 - Wire gauge: 0.14-2.5mm²(26-14 AWG)
 - Stripping length: 8-10mm

 浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO., LTD					图号 Drawing No		/		
产品代号 Part Code: HE-024-MZ (25-48)					产品料号 PART NO:		09330242811		
Date:	2025.01.15	Scale	REV	Weight	Qty	Drawn:		SHEET	
	All Dimensions in mm Original Size DIN A 4		HK-1	/	/	Tang		1/1	