




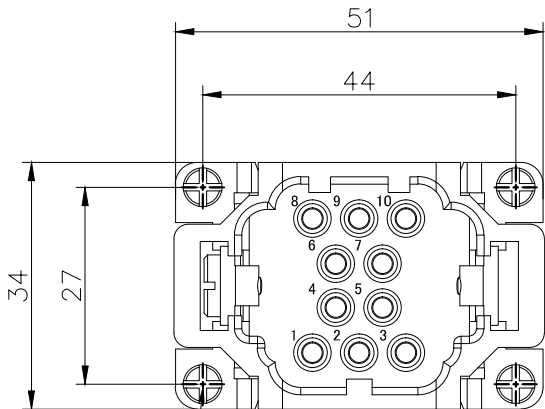


4XM3 SCREW,RECOMMENDED
TIGHTENING TORQUE 0.5N.m
4XM3螺丝,推荐锁紧力矩0.5N.m

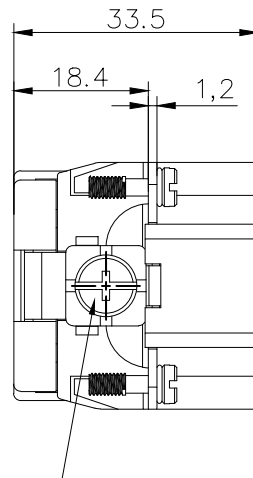

M5 SCREW,RECOMMENDED
TIGHTENING TORQUE 2.0N.m
M5螺丝,推荐锁紧力矩2.0N.m

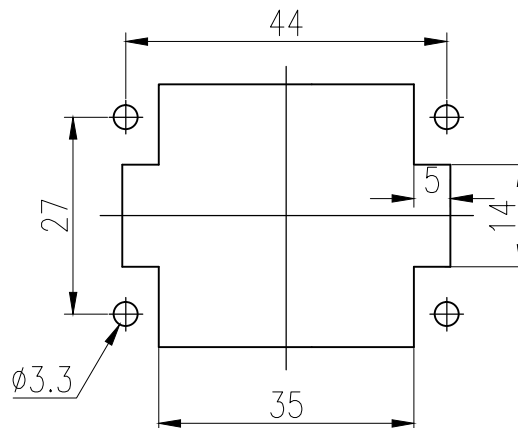

面板安装开孔图
Panel cut out

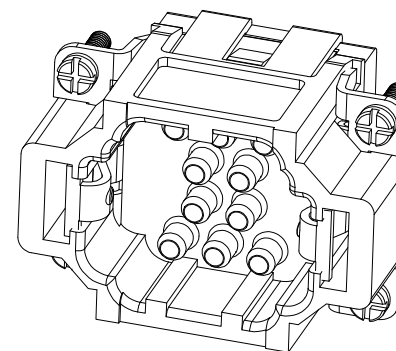

技术参数:
插芯:

- 插针数: 10+PE
- 额定电流: 16A
- 额定电压: 500V
- 额定脉冲电压: 6kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500
- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理:
 - 镀银
 - 银金
- 接触电阻: $\leq 1\text{m}\Omega$
- 线径范围: $0.14-4.0\text{mm}^2(26-12\text{AWG})$

- Tools:
- 剥线长度: 7.5mm
 - 工具:
 - 冷压钳: TL02G($0.14-4\text{mm}^2$)
 - 退针器: TL01

Technical specification:
Inserts:

- No. of contact: 10+PE
- Rated current: 16A
- Rated voltage: 500V
- Rated impulse voltage: 6kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance: $>10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: >500
- Terminal: crimp terminal
- Material: copper alloy
- Surface:
 - Hard-silver plated
 - Hard-gold plated
- Contact resistance: $\leq 1\text{m}\Omega$
- Wire gauge: $0.14-4.0\text{mm}^2(26-12\text{AWG})$
- Stripping length: 7.5mm

- Contacts:
- Crimp contact tool: TL02G($0.14-4\text{mm}^2$)
 - Contact removal tool: TL01

ZJKK 浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO.,LTD		图号 Drawing No:		/	
		产品代号 Part Code:		HEE-010-MC	
产品料号 PART NO:		09320103001			
Date:	2025.01.14	Scale	REV	Weight	Qty
	All Dimensions in mm Original Size DIN A 4		2:1	HK-1	/
Tang		SHEET		1/1	