


	8	7	6	5	4	3	2	1	
H	产品代号/Part NO.	线径/Wire Diameter	ϕA	ϕB	剥线长度 Stripping length				H
		mm ²							
	CKSF70-10	10	5.6	4.3	15.5				
G	CKSF70-16	16	8.5	5.5	15.5				G
F									F
E									E
D									D
C									C
B									B
A									A

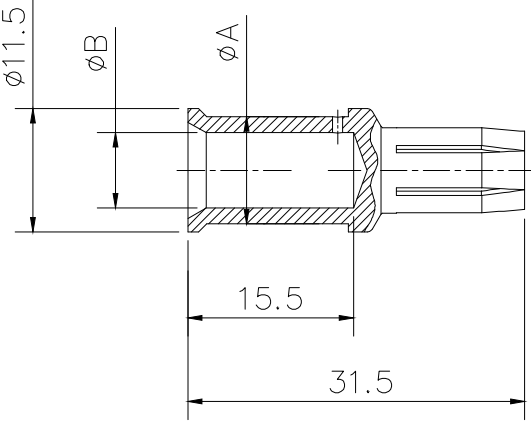

技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 70A
- 接触电阻: ≤0.5mΩ
- 线径范围: 10-16mm²
- 可插拔次数: ≥500
- 电缆绞线标准: IEC 60228-5

Technical specification:

- Material: copper alloy
- Surface: hard-silver plated
- Rated current: 70A
- Contact resistance: ≤0.5mΩ
- Wire gauge: 10-16mm²
- Mating cycles: ≥500
- For stranded fine wire acc.to: IEC 60228-5



浙江昊科电气有限公司
ZHEJIANG HAOKE ELECTRICAL CO.,LTD

产品代号
Part Code:


CKSF70-XX

图号
Drawing No:

/

产品料号
PART NO:

/

Date:	2018.6.21	Scale	REV	Weight	Qty	Drawn:		SHEET
	All Dimensions in mm Original Size DIN A 4	2:1	HK-1	/	/	Tang		1/1