


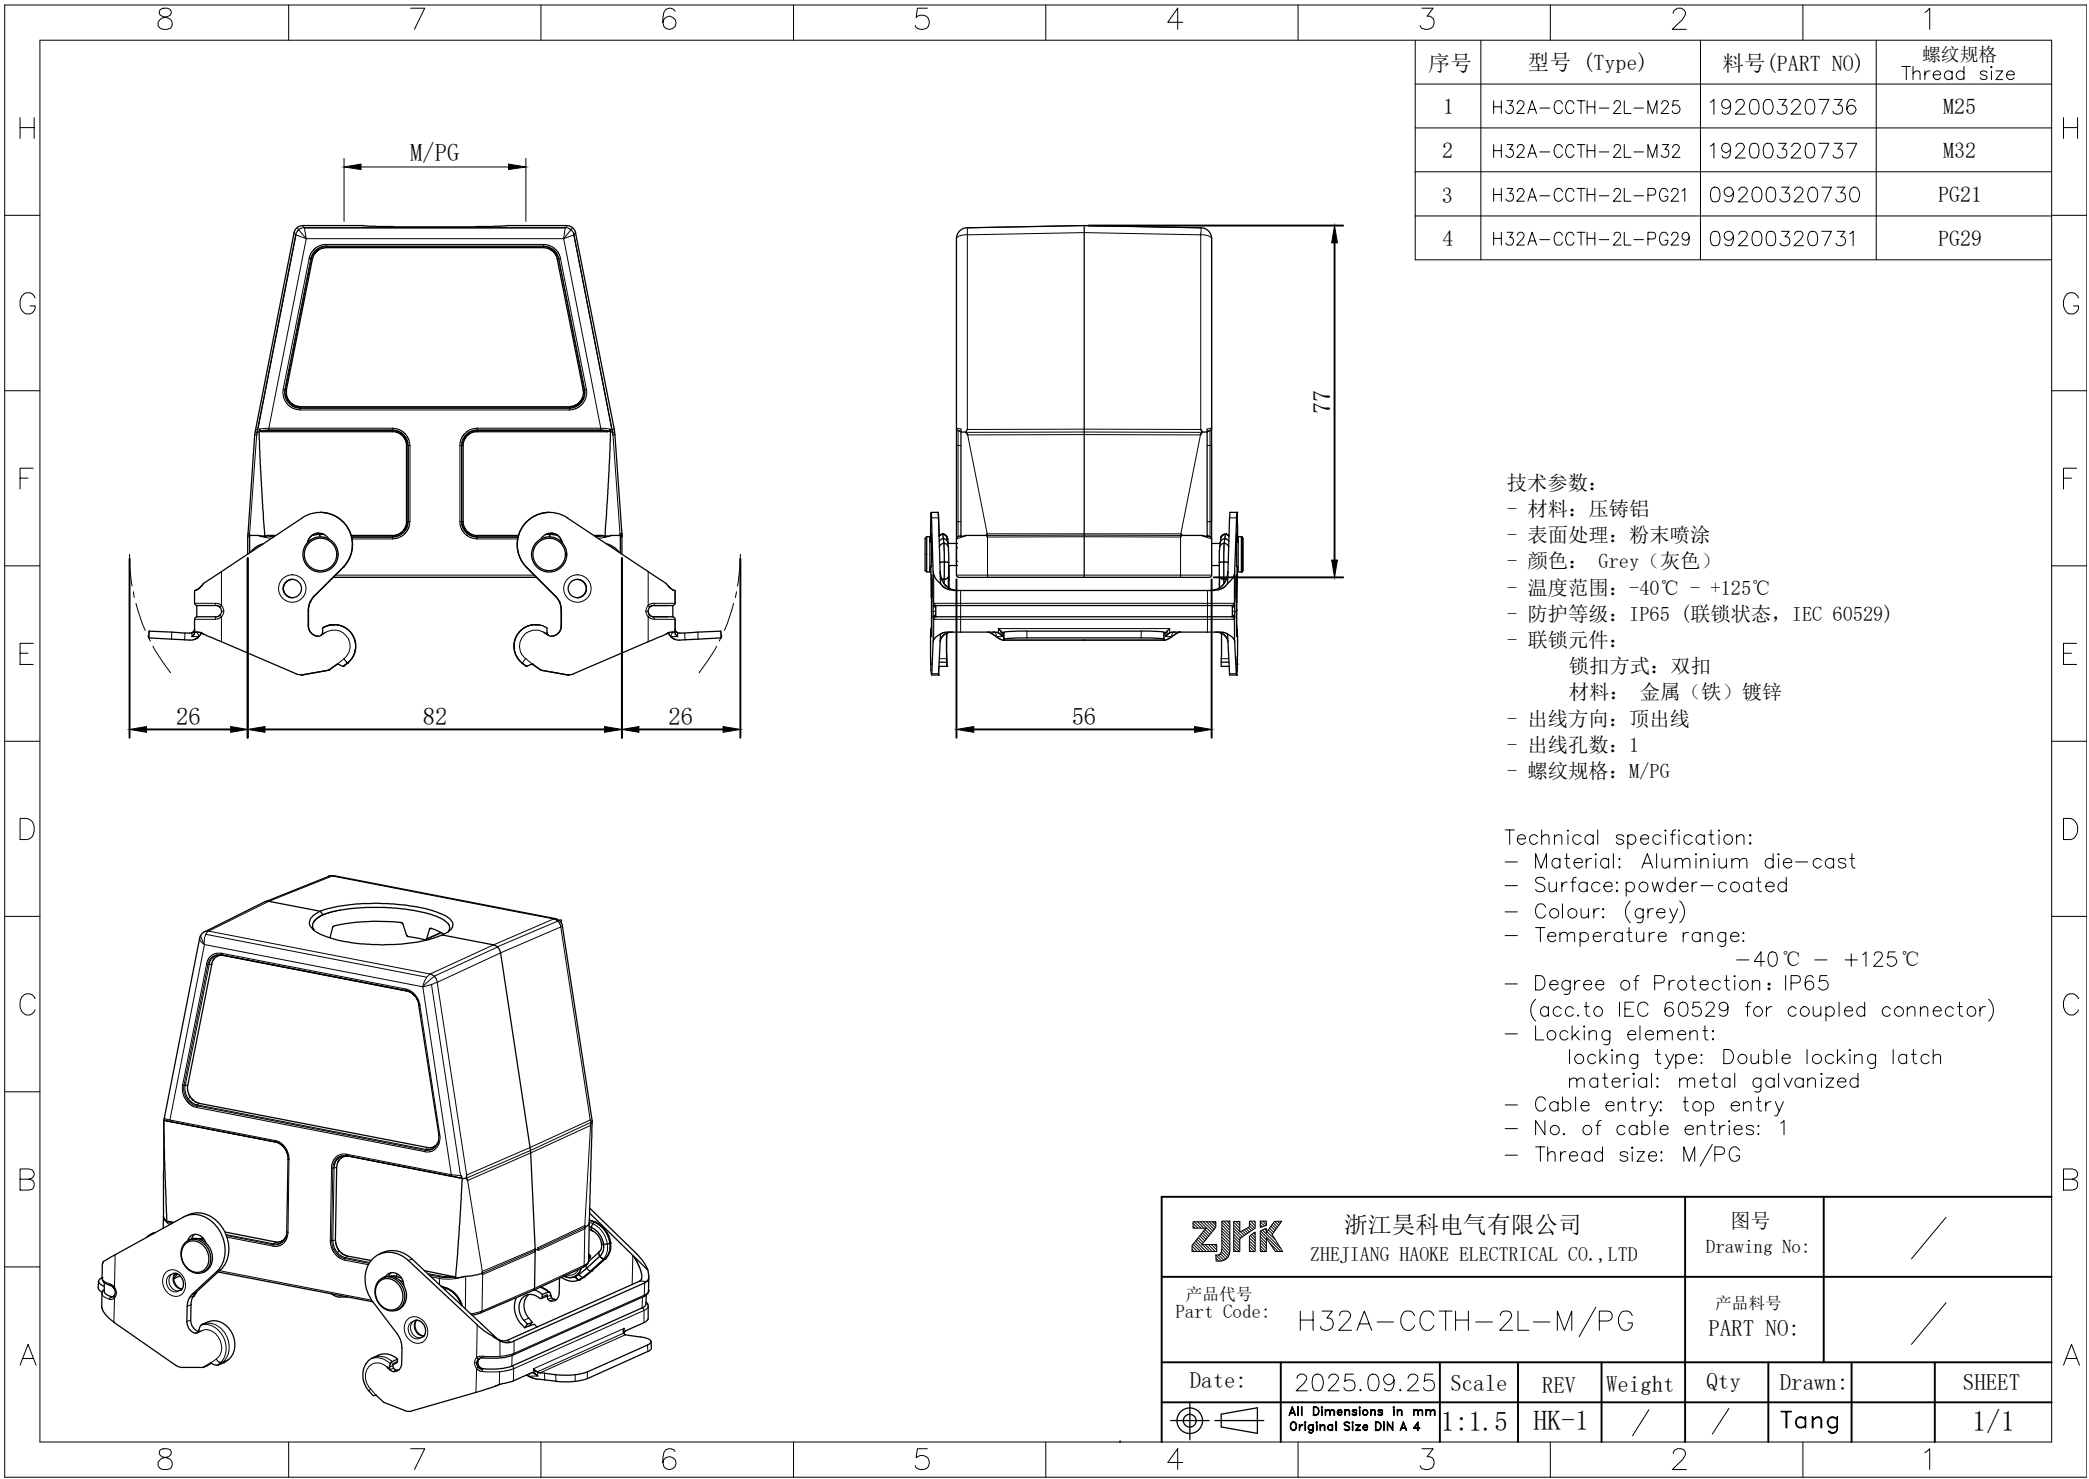

| 序号 | 型号 (Type)         | 料号 (PART NO) | 螺纹规格<br>Thread size |
|----|-------------------|--------------|---------------------|
| 1  | H32A-CCTH-2L-M25  | 19200320736  | M25                 |
| 2  | H32A-CCTH-2L-M32  | 19200320737  | M32                 |
| 3  | H32A-CCTH-2L-PG21 | 09200320730  | PG21                |
| 4  | H32A-CCTH-2L-PG29 | 09200320731  | PG29                |

技术参数:  
- 材料: 压铸铝  
- 表面处理: 粉末喷涂  
- 颜色: Grey (灰色)  
- 温度范围: -40℃ - +125℃  
- 防护等级: IP65 (联锁状态, IEC 60529)  
- 联锁元件:  
    锁扣方式: 双扣  
    材料: 金属 (铁) 镀锌  
- 出线方向: 顶出线  
- 出线孔数: 1  
- 螺纹规格: M/PG

Technical specification:  
- Material: Aluminium die-cast  
- Surface: powder-coated  
- Colour: (grey)  
- Temperature range:  
    -40℃ - +125℃  
- Degree of Protection: IP65  
    (acc.to IEC 60529 for coupled connector)  
- Locking element:  
    locking type: Double locking latch  
    material: metal galvanized  
- Cable entry: top entry  
- No. of cable entries: 1  
- Thread size: M/PG

|                                                             |                                               |       |      |        |                   |        |   |       |
|-------------------------------------------------------------|-----------------------------------------------|-------|------|--------|-------------------|--------|---|-------|
| <b>ZJHK</b> 浙江昊科电气有限公司<br>ZHEJIANG HAOKE ELECTRICAL CO.,LTD |                                               |       |      |        | 图号<br>Drawing No: |        | / |       |
| 产品代号<br>Part Code: H32A-CCTH-2L-M/PG                        |                                               |       |      |        | 产品料号<br>PART NO:  |        | / |       |
| Date:                                                       | 2025.09.25                                    | Scale | REV  | Weight | Qty               | Drawn: |   | SHEET |
|                                                             | All Dimensions in mm<br>Original Size DIN A 4 | 1:1.5 | HK-1 | /      | /                 | Tang   |   | 1/1   |