


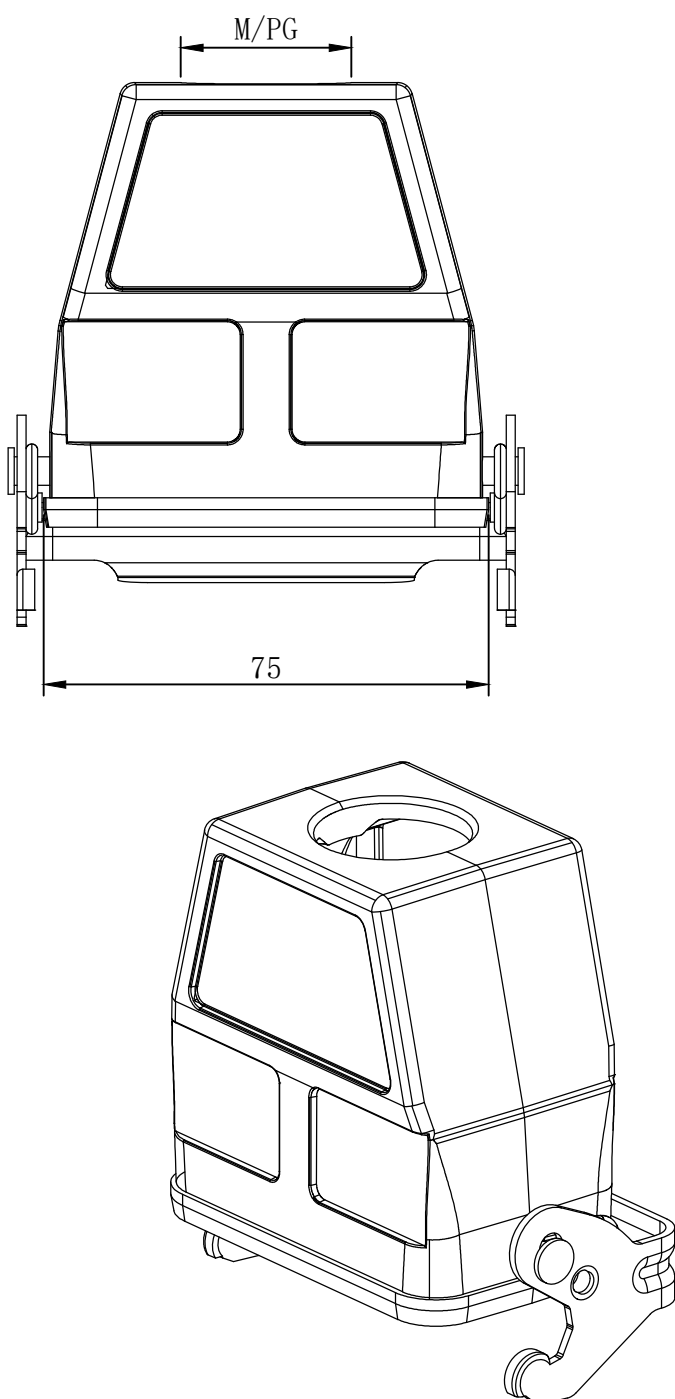

序号	型号 (Type)	料号 (PART NO)	螺纹规格 Thread size
1	H10B-CCTH-1L-PG21	09300100752	PG21
2	H10B-CCTH-1L-PG29	09300100753	PG29
3	H10B-CCTH-1L-M25	19300100756	M25
4	H10B-CCTH-1L-M32	19300100757	M32

- 技术参数:
- 材料: 压铸铝
 - 表面处理: 粉末喷涂
 - 颜色: Grey (灰色)
 - 温度范围: -40℃ - +125℃
 - 防护等级: IP65 (联锁状态, IEC 60529)
 - 联锁元件:
 - 锁扣方式: 单扣
 - 材料: 金属 (铁) 镀锌
 - 出线方向: 顶出线
 - 出线孔数: 1
 - 螺纹规格: M/PG
 - 密封元件: NBR

- Technical specification:
- Material: Aluminium die-cast
 - Surface: powder-coated
 - Colour: (grey)
 - Temperature range:
 - 40℃ - +125℃
 - Degree of Protection: IP65
(acc.to IEC 60529 for coupled connector)
 - Locking element:
 - locking type: single locking latch
 - material: metal galvanized
 - Cable entry: top entry
 - No. of cable entries: 1
 - Thread size: M/PG
 - Hoods/Housings sealing: NBR

ZJK 浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO.,LTD				图号 Drawing No:		/		
产品代号 Part Code: H10B-CCTH-1L-M&PG				产品料号 PART NO:		/		
Date:	2025.09.02	Scale	REV	Weight	Qty	Drawn:		
All Dimensions in mm Original Size DIN A 4		1:2	HK-1	/	/	Tang		
							SHEET	
							1/1	