
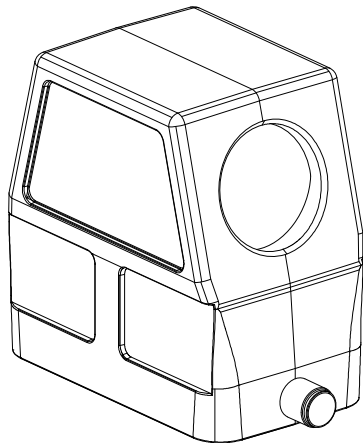
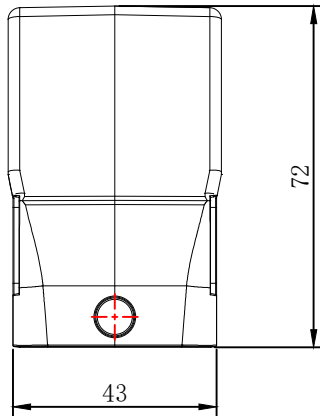


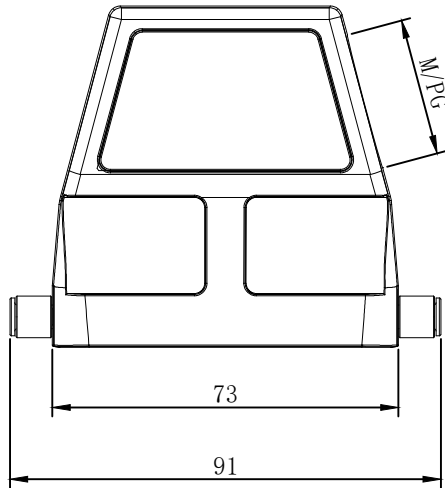

| 序号 | 型号 (Type)        | 料号 (PART NO) | 螺纹规格<br>Thread size |
|----|------------------|--------------|---------------------|
| 1  | H10B-SEH-2B-M25  | 19300100546  | M25                 |
| 2  | H10B-SEH-2B-M32  | 19300100547  | M32                 |
| 3  | H10B-SEH-2B-PG21 | 09300100542  | PG21                |
| 4  | H10B-SEH-2B-PG29 | 09300100543  | PG29                |

- 技术参数:
- 材料: 压铸铝
  - 表面处理: 粉末喷涂
  - 颜色: Grey (灰色)
  - 温度范围: -40℃ - +125℃
  - 防护等级: IP65 (联锁状态, IEC 60529)
  - 出线方向: 侧出线
  - 出线孔数: 1
  - 螺纹规格: M/PG
- Technical specification:
- Material: Aluminium die-cast
  - Surface: powder-coated
  - Colour: (grey)
  - Temperature range: -40℃ - +125℃
  - Degree of Protection: IP65 (acc.to IEC 60529 for coupled connector)
  - Cable entry: side entry
  - No. of cable entries: 1
  - Thread size: M/PG

|                                                            |                                               |       |      |                   |     |        |  |       |
|------------------------------------------------------------|-----------------------------------------------|-------|------|-------------------|-----|--------|--|-------|
| <b>ZJK</b> 浙江昊科电气有限公司<br>ZHEJIANG HAOKE ELECTRICAL CO.,LTD |                                               |       |      | 图号<br>Drawing No: |     | /      |  |       |
| 产品代号<br>Part Code:                                         |                                               |       |      | 产品料号<br>PART NO:  |     | /      |  |       |
| Date:                                                      | 2026.08.01                                    | Scale | REV  | Weight            | Qty | Drawn: |  | SHEET |
|                                                            | All Dimensions in mm<br>Original Size DIN A 4 | 1:1.5 | HK-1 | /                 | /   | Tang   |  | 1/1   |