
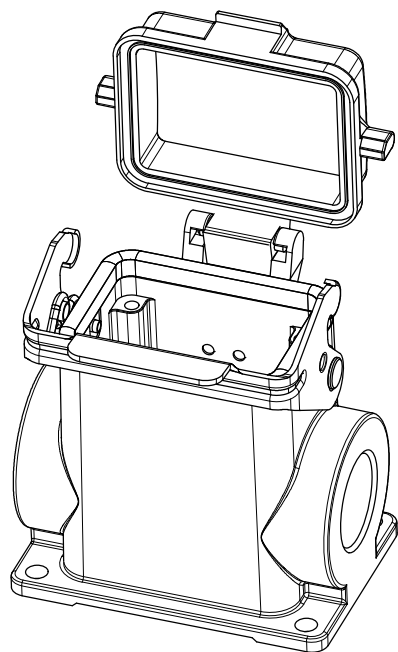
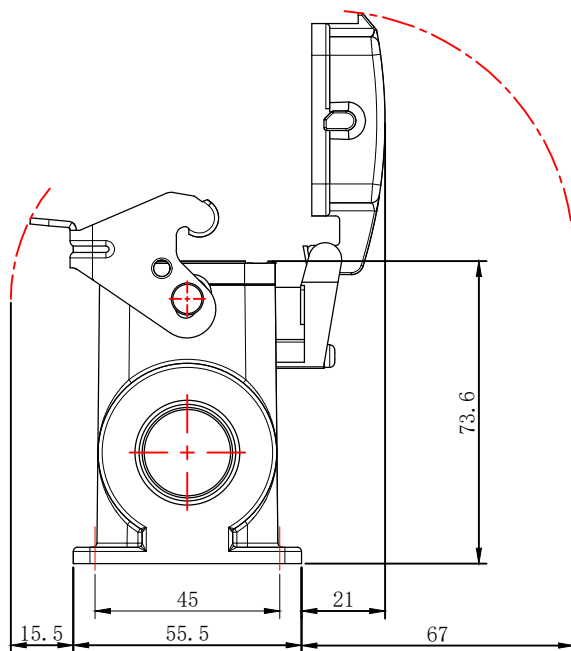


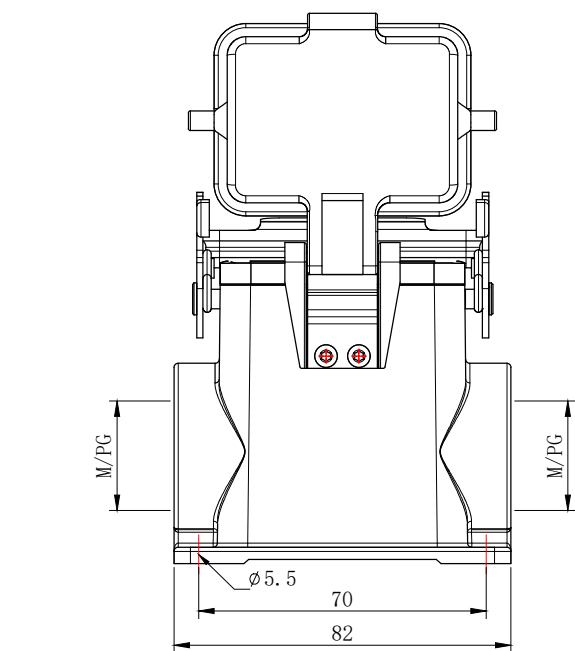

序号	型号 (Type)	料号 (PART NO)	螺纹规格 Thread size
1	H6B-SFH-1L-CV-2M25	19300060296	M25
2	H6B-SFH-1L-CV-2M32	19300060297	M32
3	H6B-SFH-1L-CV-2PG21	09300060297	PG21
4	H6B-SFH-1L-CV-2PG29	09300060298	PG29

技术参数:

- 材料: 压铸铝
- 表面处理: 粉末喷涂
- 颜色: Grey (灰色)
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 防护等级: IP65 (联锁状态, IEC 60529)
- 联锁元件:
 - 锁扣方式: 单扣
 - 材料: 金属 (铁) 镀锌
- 出线方向: 侧出线
- 出线孔数: 2
- 螺纹规格: M/PG
- 密封元件: NBR

Technical specification:

- Material: Aluminium die-cast
- Surface: powder-coated
- Colour: (grey)
- Temperature range:
 - -40°C - $+125^{\circ}\text{C}$
- Degree of Protection: IP65
(acc.to IEC 60529 for coupled connector)
- Locking element:
 - locking type: single locking latch
 - material: metal galvanized
- Cable entry: side entry
- No. of cable entries: 2
- Thread size: M/PG
- Hoods/Housings sealing: NBR

ZJK 浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO.,LTD				图号 Drawing No:		/		
产品代号 Part Code:				产品料号 PART NO:		/		
Date:	2025.09.01	Scale	REV	Weight	Qty	Drawn:		
All Dimensions in mm Original Size DIN A 4		1:2	HK-1	/	/	Tang		
							SHEET	
							1/1	