
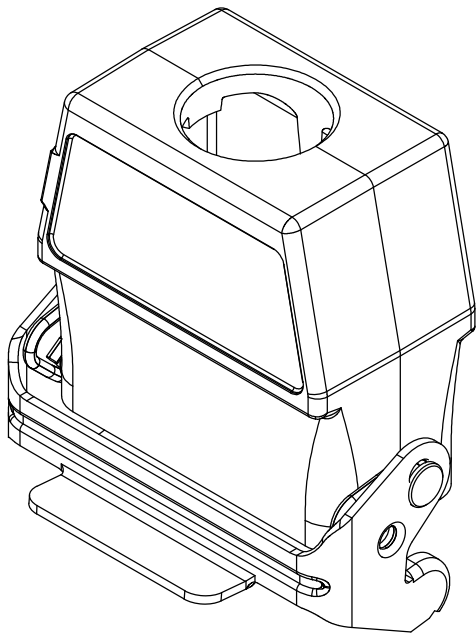
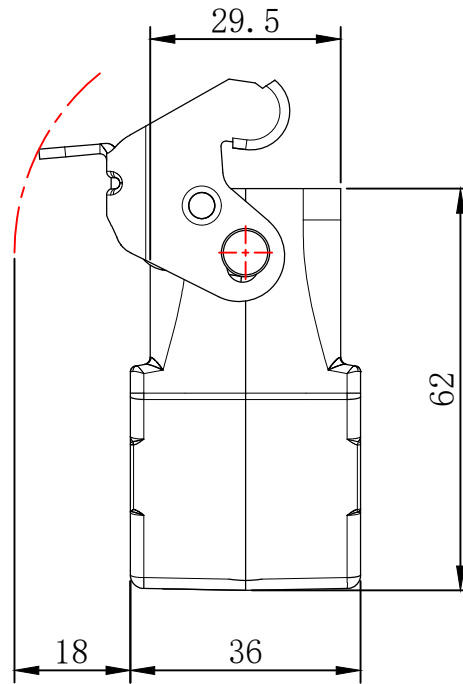


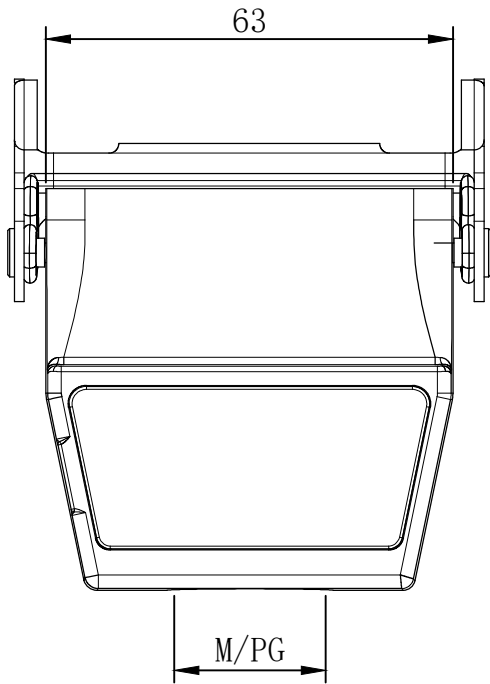

序号	型号 (Type)	料号 (PART NO)	螺纹规格 Thread size
1	H10A-CCTH-1L-PG16	09200100751	PG16
2	H10A-CCTH-1L-PG21	09200100752	PG21
3	H10A-CCTH-1L-M20	19200100735-1	M20
4	H10A-CCTH-1L-M25	19200100736	M25

技术参数:

- 材料: 压铸铝
- 表面处理: 粉末喷涂
- 颜色: Grey (灰色)
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 防护等级: IP65 (联锁状态, IEC 60529)
- 联锁元件:

锁扣方式: 单扣

材料: 金属 (铁) 镀锌

- 出线方向: 顶出线
- 出线孔数: 1
- 螺纹规格: M/PG

Technical specification:

- Material: Aluminium die-cast
- Surface: powder-coated
- Colour: (grey)
- Temperature range:
 -40°C - $+125^{\circ}\text{C}$
- Degree of Protection: IP65
(acc.to IEC 60529 for coupled connector)
- Locking element:
locking type: single locking latch
material: metal galvanized
- Cable entry: top entry
- No. of cable entries: 1
- Thread size: M/PG

 浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO.,LTD					图号 Drawing No:		/	
产品代号 Part Code: H10A-CCTH-1L-M&PG					产品料号 PART NO:		/	
Date:	2025.07.28	Scale	REV	Weight	Qty	Drawn:		SHEET
	All Dimensions in mm Original Size DIN A 4	1:2	HK-1	/	/	Tang		1/1