
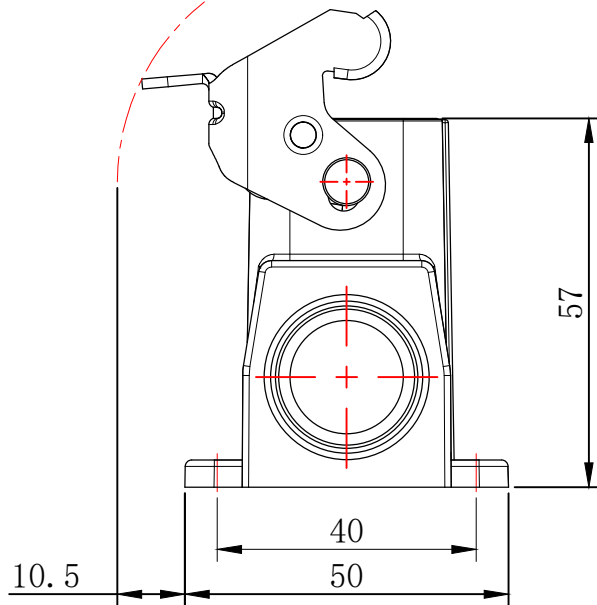


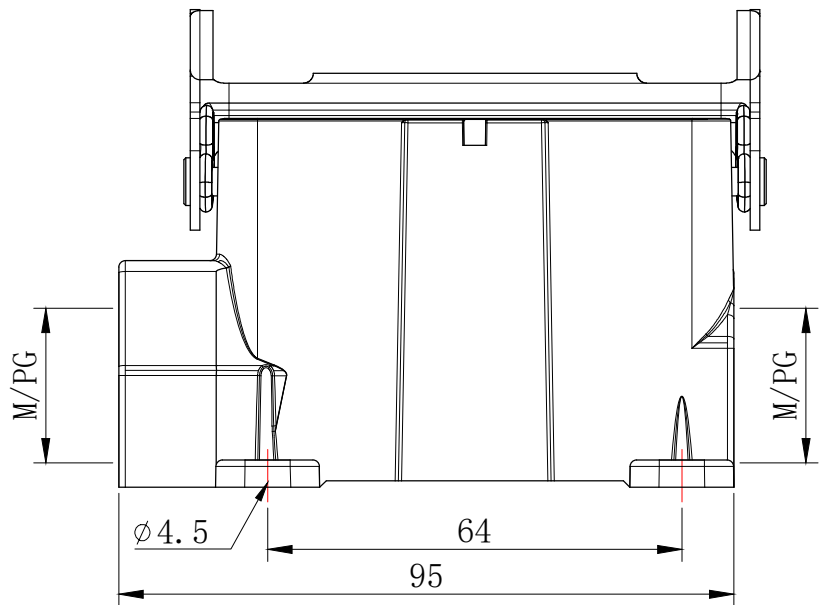


| 序号 | 型号 (Type)        | 料号 (PART NO) | 螺纹规格<br>Thread size |
|----|------------------|--------------|---------------------|
| 1  | H16A-SF-1L-2M20  | 19200160290  | M20                 |
| 2  | H16A-SF-1L-2M25  | 19200160291  | M25                 |
| 3  | H16A-SF-1L-2PG16 | 09200160291  | PG16                |

技术参数:

- 材料: 压铸铝
- 表面处理: 粉末喷涂
- 颜色: Grey (灰色)
- 温度范围: -40℃ - +125℃
- 防护等级: IP65 (联锁状态, IEC 60529)
- 联锁元件:
  - 锁扣方式: 单扣
  - 材料: 金属 (铁) 镀锌
- 出线方向: 侧出线
- 出线孔数: 2
- 螺纹规格: M/PG

Technical specification:

- Material: Aluminium die-cast
- Surface: powder-coated
- Colour: (grey)
- Temperature range:
  - 40℃ - +125℃
- Degree of Protection: IP65  
(acc.to IEC 60529 for coupled connector)
- Locking element:
  - locking type: single locking latch
  - material: metal galvanized
- Cable entry: side entry
- No. of cable entries: 2
- Thread size: M/PG

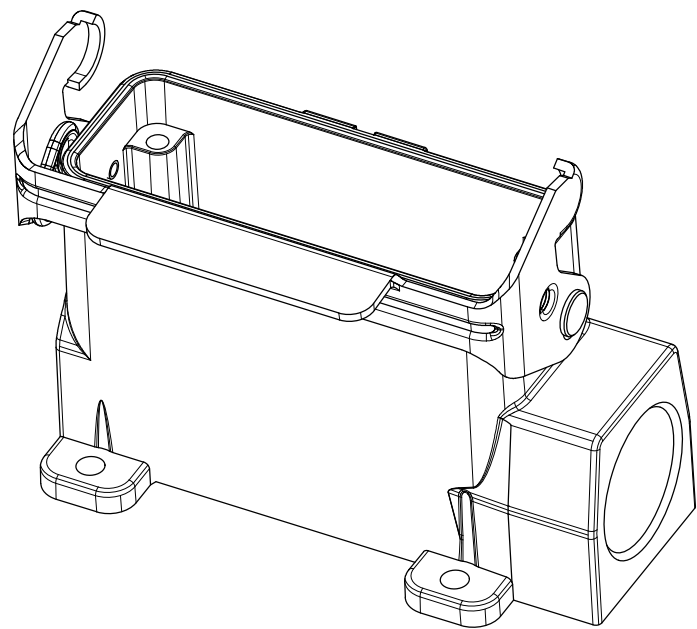

|                                                            |  |                                               |       |                   |        |     |        |       |
|------------------------------------------------------------|--|-----------------------------------------------|-------|-------------------|--------|-----|--------|-------|
| <b>ZJK</b> 浙江昊科电气有限公司<br>ZHEJIANG HAOKE ELECTRICAL CO.,LTD |  |                                               |       | 图号<br>Drawing No: |        | /   |        |       |
| 产品代号<br>Part Code:                                         |  |                                               |       | 产品料号<br>PART NO:  |        | /   |        |       |
| Date:                                                      |  | 2025.07.30                                    | Scale | REV               | Weight | Qty | Drawn: | SHEET |
|                                                            |  | All Dimensions in mm<br>Original Size DIN A 4 |       | 1:1.5             | HK-1   | /   | Tang   | 1/1   |