
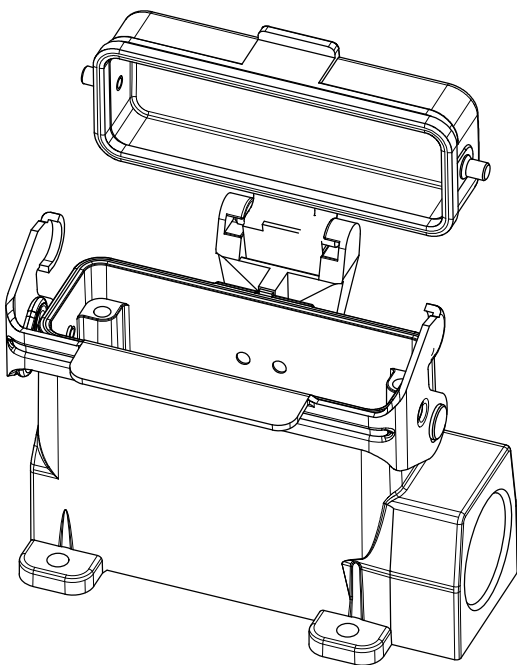
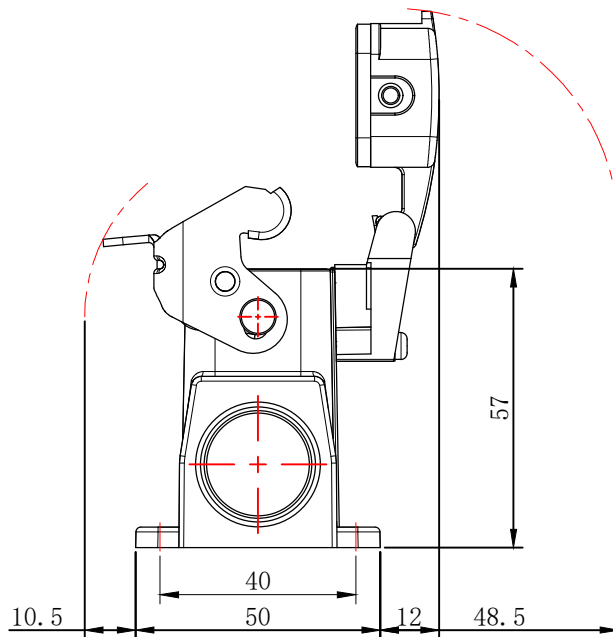


H
G
F
E
D
C
B
A

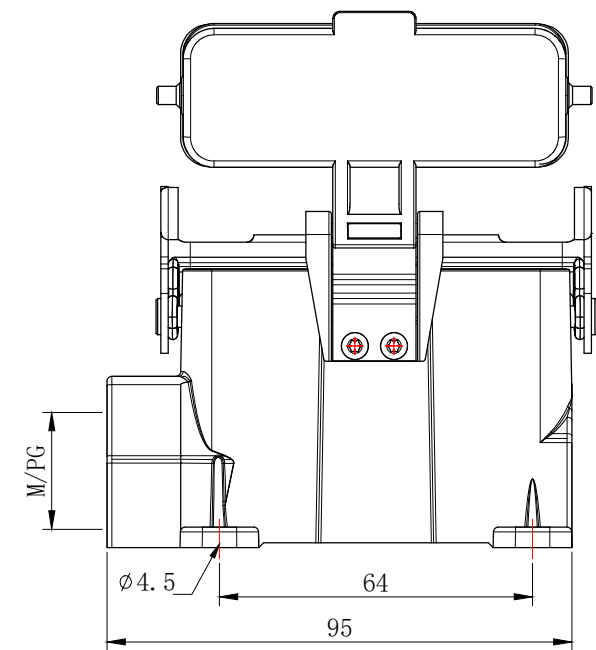

序号	型号 (Type)	料号 (PART NO)	螺纹规格 Thread size
1	H16A-SF-1L-MCV-M20	19200160694	M20
2	H16A-SF-1L-MCV-M25	19200160696	M25
3	H16A-SF-1L-MCV-PG16	09200160651	PG16
4	H16A-SF-1L-MCV-PG21	09200160652	PG21

技术参数:

- 材料: 压铸铝
- 盖子材料: 压铸铝
- 表面处理: 粉末喷涂
- 颜色: Grey (灰色)
- 温度范围: -40℃ - +125℃
- 防护等级: IP65 (联锁状态, IEC 60529)
- 联锁元件:

锁扣方式: 单扣

材料: 金属 (铁) 镀锌

- 出线方向: 侧出线
- 出线孔数: 1
- 螺纹规格: M/PG
- 密封元件: NBR

Technical specification:

- Material: Aluminium die-cast
- Material, cover: Aluminium die-cast
- Surface: powder-coated
- Colour: (grey)
- Temperature range:
-40℃ - +125℃
- Degree of Protection: IP65
(acc.to IEC 60529 for coupled connector)
- Locking element:
locking type: single locking latch
material: metal galvanized
- Cable entry: side entry
- No. of cable entries: 1
- Thread size: M/PG
- Hoods/Housings sealing: NBR

ZJK 浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO.,LTD				图号 Drawing No:		/		
产品代号 Part Code:				产品料号 PART NO:		/		
Date:	2025.07.30	Scale	REV	Weight	Qty	Drawn:		
All Dimensions in mm Original Size DIN A 4		1:1.5	HK-1	/	/	Tang		
							SHEET	
							1/1	

8 7 6 5 4 3 2 1