
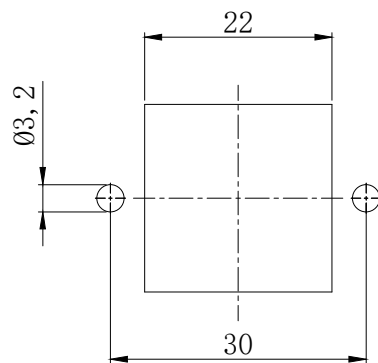
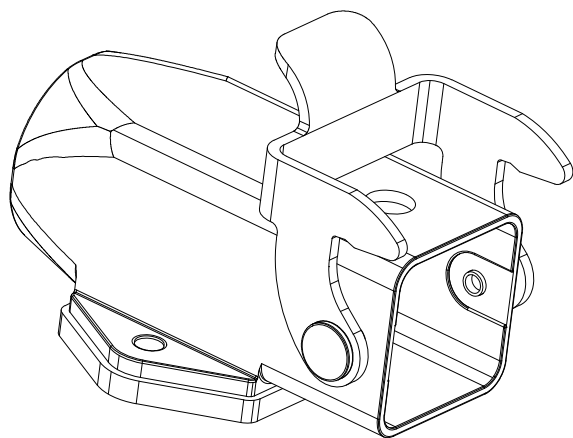
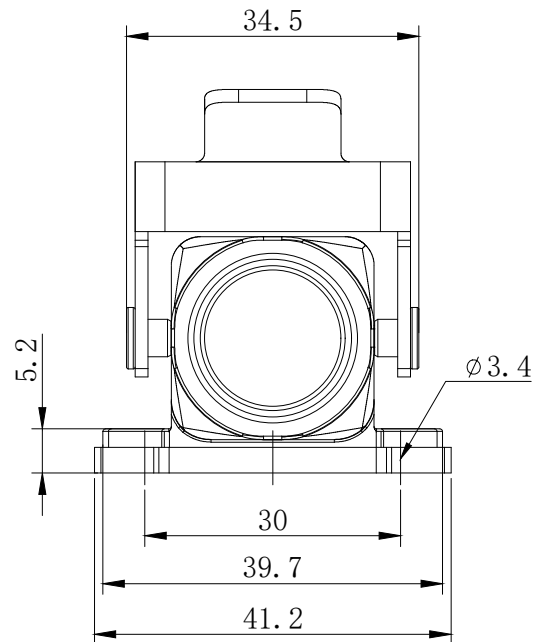


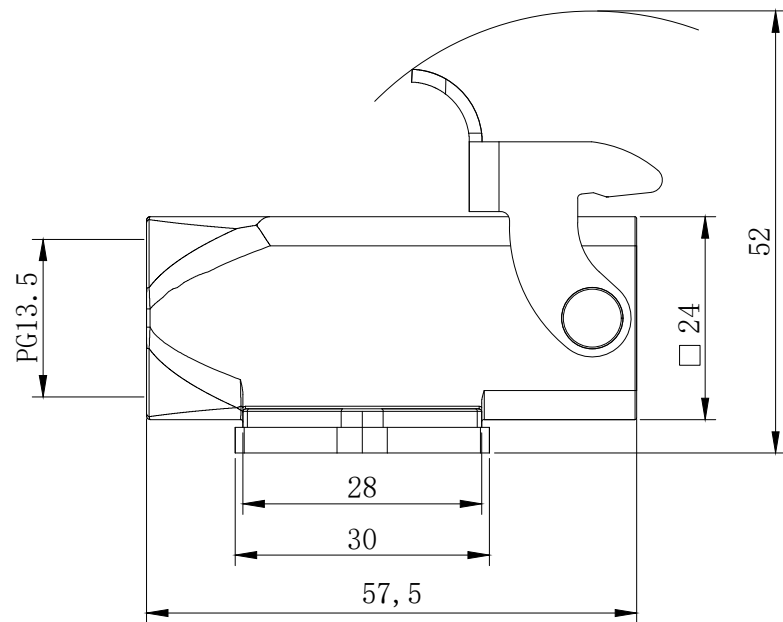

面板开孔图
panel cut out

技术参数:

- 材料: 压铸铝
- 表面处理: 粉末喷涂
- 颜色: Grey (灰色)
- 温度范围: -40℃ - +125℃
- 防护等级: IP65 (联锁状态, IEC 60529)
- 联锁元件:
 - 锁扣方式: 单扣
 - 材料: 不锈钢
- 出线方向: 侧出线
- 出线孔数: 1
- 螺纹规格: PG13.5

Technical specification:

- Material: zinc die-cast
- Surface: powder-coated
- Colour: (grey)
- Temperature range:
 - 40℃ - +125℃
- Degree of Protection: IP65
(acc.to IEC 60529 for coupled connector)
- Locking element:
 - locking type: single locking latch
 - material: stainless steel
- Cable entry: side entry
- No. of cable entries: 1
- Thread size: PG13.5

ZJK 浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO., LTD				图号 Drawing No:		/		
产品代号 Part Code: H3A-SF-1L-PG13.5				产品料号 PART NO:		09200031253		
Date:	2018.08.10	Scale	REV	Weight	Qty	Drawn:		SHEET
	All Dimensions in mm Original Size DIN A 4		1:1	HK-1	/	Tang		1/1