




## 附件/框架 Accessories

## 编码 Coding

## 编码销 Code pin


型号 Designation	订货号 Part Number
CODE-E	09330009954



- ① 使用此编码销,可避免相同连接器的误插
- ② 适用于HEC,HEE,HE-5/0,HM-006,HM-008
- ③ 使用编码销时,公插对应孔不能装插针
- ① Use of the coding pin prevents incorrect mating to other connectors of the same type.
- ② For HEC,HEE,HE-5/0,HM-006,HM-008
- ③ The male pin should be omitted from the opposing cavity in the male insert.

## 编码销 Code pin


型号 Designation	订货号 Part Number
CODE-D	09330009915



- ① 使用此编码销,可避免相同连接器的误插
- ② 适用于HD,HDD,HMD-012, HMDD-017, HQ-7/0, HQ-012/0
- ③ 使用编码销时,公插对应孔不能装插针
- ① Use of the coding pin prevents incorrect mating to other connectors of the same type.
- ② For HD,HDD,HMD-012, HMDD-017, HQ-7/0, HQ-012/0
- ③ The male pin should be omitted from the opposing cavity in the male insert.


## 滚花螺栓 Screw pin

型号 Designation	订货号 Part Number
GH-M4	09330009910

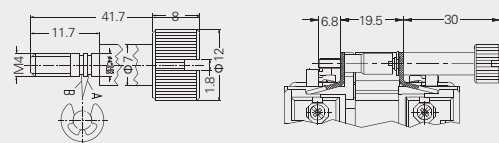

## 套筒螺栓 Screw bash

型号 Designation	订货号 Part Number
GHT-M3	09330009912






## 固定框架 frame

### 安装架 Mounting

用于H version  
for H version housings



规格 Size	型号 Designation	订货号 Part Number
6B	HP6B-MF	09400009921
10B	HP10B-MF	09400009922
16B	HP16B-MF	09400009923
24B	HP24B-MF	09400009924

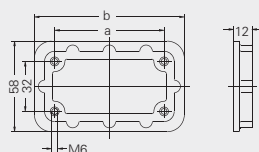

规格 Size	a	b
6B	70	96
10B	83	109
16B	103	129
24B	130	156

### 对接架 Docking frame




规格 Size	型号 Designation	订货号 Part Number
6B	H6B-ADK	09300061701
10B	H10B-ADK	09300101701
16B	H16B-ADK	09300161701
24B	H24B-ADK	09300241701

#### 技术参数 Technical characteristics

材料 Material  
-对接架 Docking frame 不锈钢 stainless steel  
-固定螺栓 Fixing screws 铁, 镀锌 steel, zinc-plated

插入容差 Pull-in-range  
-x轴 x-axis ±1.5mm  
-y轴 y-axis ±1.5mm  
拔插次数 Mechanical working life ≥500

#### 安装开口 Assembly cut put

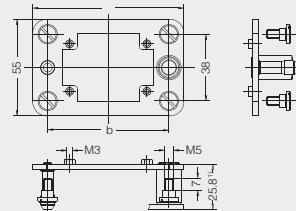

1) 距离 电气针和光线电缆距离最大27mm  
气动针距离最大26.5mm  
Distance for electrical and F.O. contacts max. 27 mm; for pneumatic contacts max. 26.5 mm

#### 产品包括 Range of delivery:

1个架子 1 frame  
4个带平头的螺栓, 用于固定对接架  
4 cheese head shoulder screws  
to fix the docking frame

规格 Size	a	b	c	d	e
6B	86	69	69	54.5	84
10B	99	82	82	67.5	97
16B	119.5	102.5	102.5	88	117.5
24B	146	129	129	114.5	144

